

SELF-ALIGNING BEARING SUPPORTS **2021**



teCom
Technology Components




Self-aligning bearing supports

Serie	Pag.	Serie	Pag.	Serie	Pag.	Serie	Pag.
UCF/C.....	156	UCF/CXA.....	166	UCFL/CA.....	176	UCPA/CX.....	194
MUCF/C.....	156	UCFL/C.....	168	UCFL/CXA.....	178	UCPA.....	196
UCF/CX.....	158	MUCFL/C.....	168	UCFB/C.....	180	UCT/C.....	198
MUCF/CX.....	158	UCFL/CX.....	170	UCFB/CX.....	182	UCT/CX.....	200
UCF.....	160	MUCFL/CX.....	170	UCFB.....	184	UCT.....	202
MUCF.....	160	UCFL.....	172	UCP/C.....	186	UCFC/C.....	204
UCF/CS.....	162	MUCFL.....	172	UCP/CX.....	188	UCFC/CX.....	206
MUCF/CS.....	162	UCFL/CS.....	174	UCP.....	190	UCFC.....	208
UCF/CA.....	164	MUCFL/CS.....	174	UCPA/C.....	192		

Square flanged bearing supports

 <p>Serie UCF/C Serie MUCF/C</p> <p>pag. 156 pag. 156</p>	 <p>New</p> <p>Serie UCF/CX Serie MUCF/CX</p> <p>pag. 158 pag. 158</p>	 <p>New</p> <p>Serie UCF Serie MUCF</p> <p>pag. 160 pag. 160</p>
 <p>New</p> <p>Serie UCF/CS Serie MUCF/CS</p> <p>pag. 162 pag. 162</p>	 <p>Serie UCF/CA</p> <p>pag. 164</p>	 <p>New</p> <p>Serie UCF/CXA</p> <p>pag. 166</p>

Oval flanged bearing supports

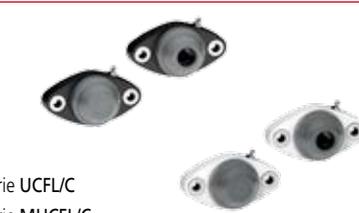 <p>Serie UCFL/C Serie MUCFL/C</p> <p>pag. 168 pag. 168</p>	 <p>New</p> <p>Serie UCFL/CX Serie MUCFL/CX</p> <p>pag. 170 pag. 170</p>	 <p>New</p> <p>Serie UCFL Serie MUCFL</p> <p>pag. 172 pag. 172</p>
 <p>New</p> <p>Serie UCFL/CS Serie MUCFL/CS</p> <p>pag. 174 pag. 174</p>	 <p>Serie UCFL/CA</p> <p>pag. 176</p>	 <p>New</p> <p>Serie UCFL/CXA</p> <p>pag. 178</p>



Side flanged bearing supports

 <p>Serie UCFB/C pag. 180</p>	 <p>New Serie UCFB/CX pag. 182</p>	 <p>New Serie UCFB pag. 184</p>
--	--	---

Pillow Blocks

 <p>Serie UCP/C pag. 186</p>	 <p>New Serie UCP/CX pag. 188</p>	 <p>New Serie UCP pag. 190</p>
---	---	--

Compact Pillow Blocks

 <p>Serie UCPA/C pag. 192</p>	 <p>New Serie UCPA/CX pag. 194</p>	 <p>New Serie UCPA pag. 196</p>
--	--	---

Take-up bearing supports

 <p>New Serie UCT/C pag. 198</p>	 <p>New Serie UCT/CX pag. 200</p>	 <p>New Serie UCT pag. 202</p>
--	---	--

Round flanged bearing supports

 <p>Serie UCFC/C pag. 204</p>	 <p>New Serie UCFC/CX pag. 206</p>	 <p>New Serie UCFC pag. 208</p>
--	--	---



Square flanged bearing supports

Serie **UCF/C**
Serie **MUCF/C**




NEW



On request covers in polypropylene blue colour Ral 5015.

Full protection of bearing

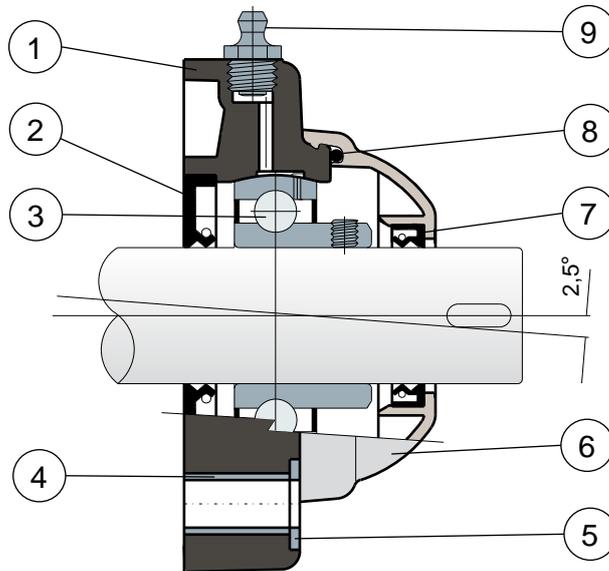

- 1) Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Square flanged bearing supports

Technical data

Serie **UCF/C**
Serie **MUCF/C**

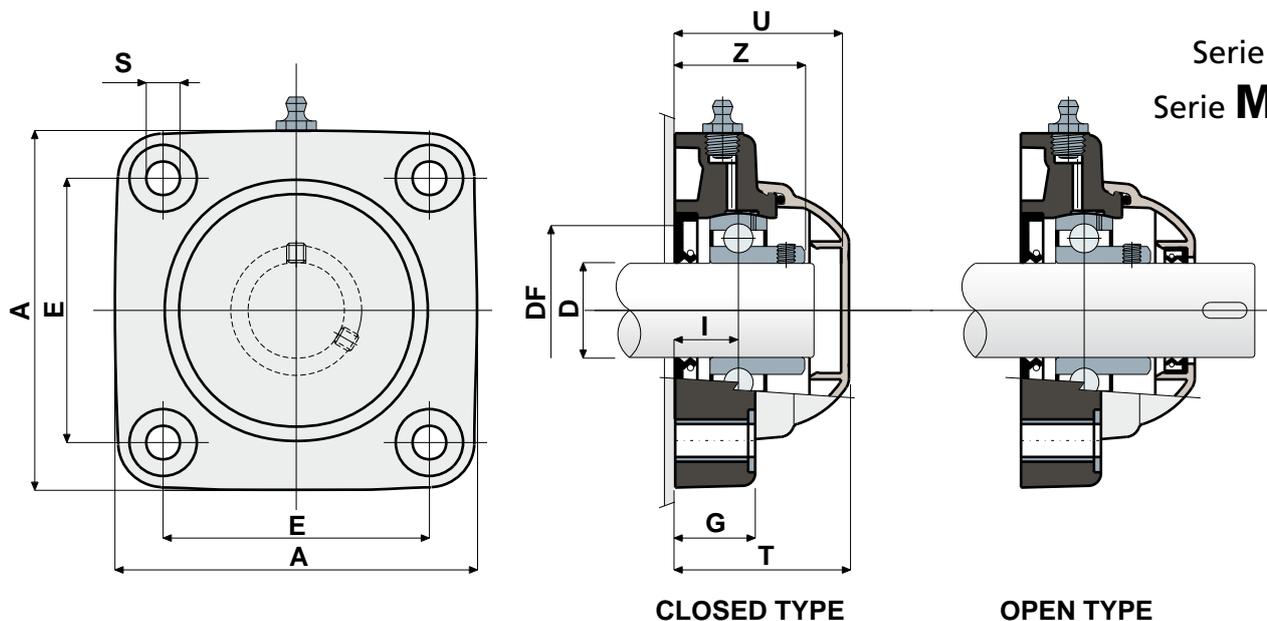

CHROME STEEL BEARING																			
D	SERIE	CODES				DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	S	G	I	Z	U	T	DF		C	C0		
		Closed type	Open type	Closed type	Open type									Max	Min				
20	UCF 204 C	80248	80249	84580	84581	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500	
25	UCF 205 C	80057	80060	84582	84583	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	
30	UCF 206 C	80009	80005	84584	84585	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	
30	MUCF 206 C	84038	84039	84586	84587	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500	
35	UCF 207 C	80058	80061	84588	84589	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000	
35	MUCF 207 C	82549	82392	84590	84591	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000	
40	UCF 208 C	80250	80251	84592	84593	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	
40	MUCF 208 C	80697	80699	84594	84595	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	

STAINLESS STEEL BEARING AISI 440																			
D	SERIE	CODES				DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	S	G	I	Z	U	T	DF		C	C0		
		Closed type	Open type	Closed type	Open type									Max	Min				
20	UCF 204 C	80400	80448	84596	84597	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600	16500	
25	UCF 205 C	80445	80449	84598	84599	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000	
30	UCF 206 C	80378	80377	84600	84601	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500	
30	MUCF 206 C	84040	84041	84602	84603	83	113	10,5	26	20	41	65	68	60	50	12500	11200	17500	
35	UCF 207 C	80446	80450	84604	84605	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000	
35	MUCF 207 C	83467	83466	84606	84607	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000	
40	UCF 208 C	80447	80451	84608	84609	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	
40	MUCF 208 C	81057	81058	84610	84611	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	

VERSIONS WITH MEASURES IN INCHES

CHROME STEEL BEARING																			
D	SERIE	CODES				DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	S	G	I	Z	U	T	DF		C	C0		
		Closed type	Open type	Closed type	Open type									Max	Min				
1"	25,4	UCF 205 C	84500	84490	84875	84876	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000
1"1/4	31,75	UCF 206 C	84501	84491	84877	84878	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500
1"1/4	31,75	MUCF 206 C	84502	84492	85180	85181	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500

MATERIALS: Support made of PA + glass fiber black or white colour; chrome steel or stainless steel bearing; greaser made of nickel plated brass; reinforcement bushings and washers made of stainless steel AISI 304; gaskets made of NBR rubber; cover made of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.

S Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




Square flanged bearing supports

Serie **UCF/CX**
Serie **MUCF/CX**



Without protection cover

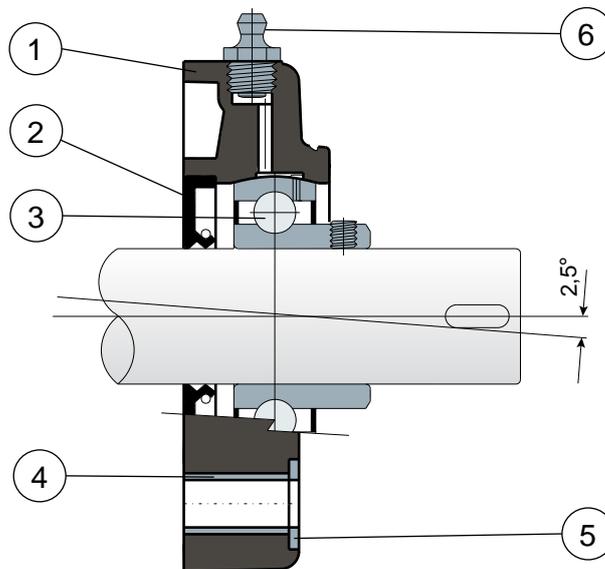

- 1) Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCF/C series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Square flanged bearing supports

Technical data

Serie **UCF/CX**
Serie **MUCF/CX**

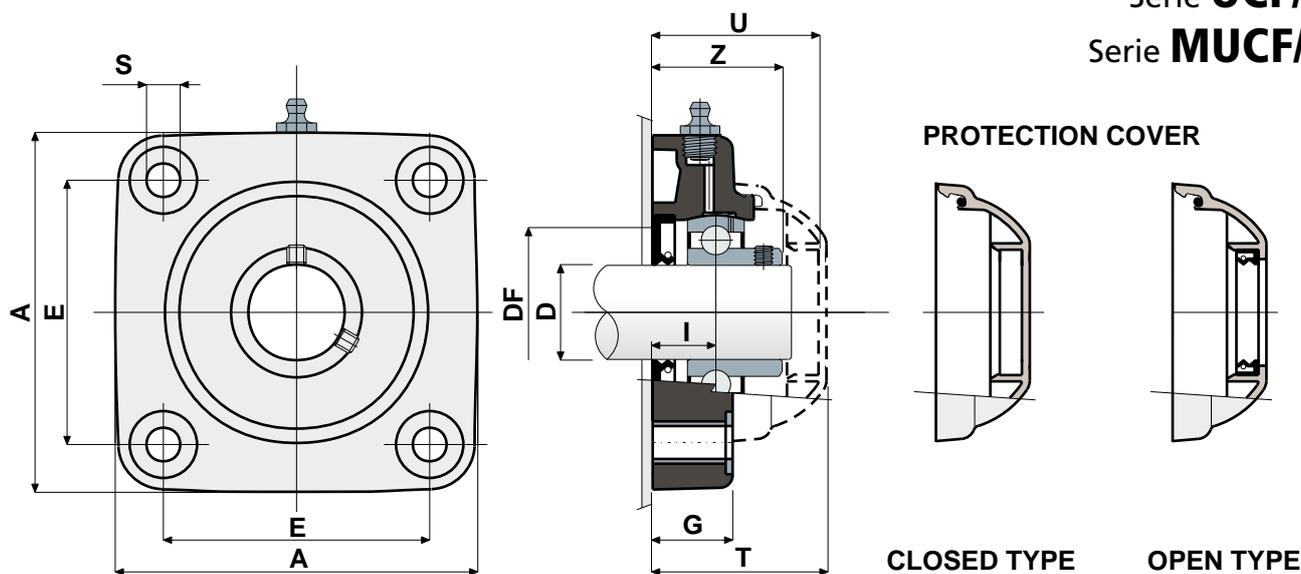

D	SERIE	CHROME STEEL BEARING											Bearing load (N)	Bearing support load (N)	GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)											COVER CODES		COVER CODES			
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF			C	CO	Closed type	Open type	Closed type	Open type
20	UCF 204 CX	80252	84612	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500	80254	80255	87259	83901
25	UCF 205 CX	80175	84613	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	80075	80076	85384	85385
30	UCF 206 CX	80176	84614	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	80011	80053	84100	80354
30	MUCF 206 CX	80789	84615	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500	80256	80494	83088	87271
35	UCF 207 CX	80177	84616	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000	80077	80078	80969	80275
35	MUCF 207 CX	83462	84617	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000	80256	80495	83088	87277
40	UCF 208 CX	80253	84618	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	80256	80257	83088	86722
40	MUCF 208 CX	80701	84619	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	80256	80257	83088	86722

D	SERIE	STAINLESS STEEL BEARING AISI 440											Bearing load (N)	Bearing support load (N)	GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)											COVER CODES		COVER CODES			
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF			C	CO	Closed type	Open type	Closed type	Open type
20	UCF 204 CX	81047	84620	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600	16500	80254	80255	87259	83901
25	UCF 205 CX	81049	84621	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000	80075	80076	85384	85385
30	UCF 206 CX	81050	84622	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500	80011	80053	84100	80354
30	MUCF 206 CX	84042	84623	83	113	10,5	26	20	41	65	68	60	50	12500	11200	17500	80256	80494	83088	87271
35	UCF 207 CX	81051	84624	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000	80077	80078	80969	80275
35	MUCF 207 CX	82404	84625	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000	80256	80495	83088	87277
40	UCF 208 CX	80561	84626	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	80256	80257	83088	86722
40	MUCF 208 CX	81043	84627	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	80256	80257	83088	86722

VERSIONS WITH MEASURES IN INCHES

D	(inches) (mm)	SERIE	CHROME STEEL BEARING											Bearing load (N)	Bearing support load (N)	GREY RAL 7042		BLUE RAL 5015			
			Support CODES		DIMENSIONS (mm)											COVER CODES		COVER CODES			
			Black colour	White colour	E	A	S	G	I	Z	U	T	DF			C	CO	(N)	Closed type	Open type	Closed type
1"	25,4	UCF 205 CX	84493	84883	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	80075	85202	85384	87273
1 1/4"	31,75	UCF 206 CX	84494	84884	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	80011	85203	84100	87274
1 1/4"	31,75	MUCF 206 CX	84495	85182	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500	80256	85204	83088	87275

MATERIALS: Support made out of PA + glass fiber black or white colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCF/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




Square flanged bearing supports

Serie **UCF**
Serie **MUCF**



Without cover and back gasket

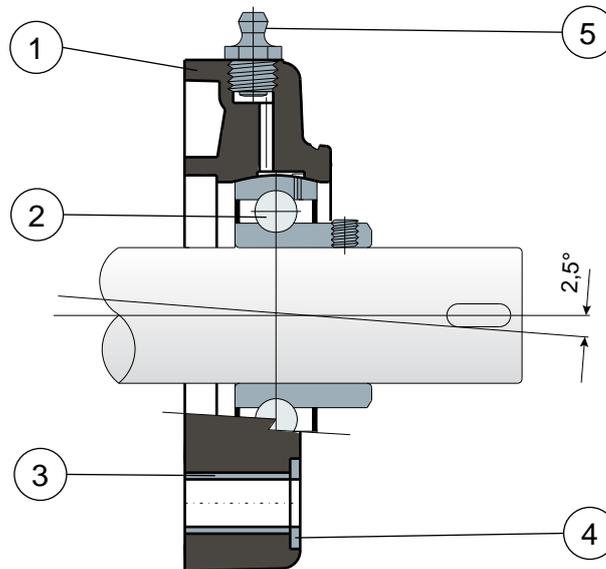

- 1) Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCF/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Square flanged bearing supports

Technical data

Serie **UCF**
Serie **MUCF**

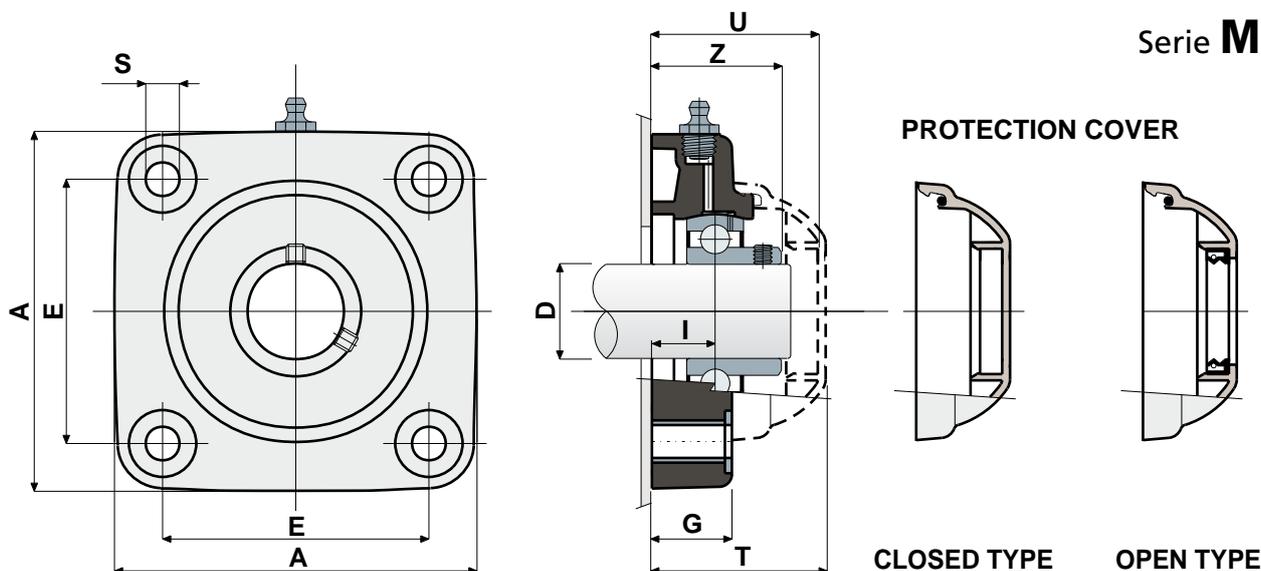

CHROME STEEL BEARING															GREY RAL 7042		BLUE RAL 5015			
D	SERIE	Support CODES		DIMENSIONS (mm)								Bearing load (N)			Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF		C	CO	(N)	Closed type	Open type	Closed type	Open type
20	UCF 204	80258	84628	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	16500	80254	80255	87259	83901
25	UCF 205	80054	84629	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	80075	80076	85384	85385
30	UCF 206	80010	84630	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	80011	80053	84100	80354
30	MUCF 206	84043	84631	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500	80256	80494	83088	87271
35	UCF 207	80055	84632	92	122	10,5	26	20	45	57	59	70	55	25500	15300	18000	80077	80078	80969	80275
35	MUCF 207	82652	84633	83	113	10,5	26	19,5	45	65	68	70	55	25500	15300	18000	80256	80495	83088	87277
40	UCF 208	80259	84634	102	133	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	80256	80257	83088	86722
40	MUCF 208	80712	84635	83	113	10,5	26	19,5	48,5	65	68	78	65	32500	19800	18000	80256	80257	83088	86722

STAINLESS STEEL BEARING AISI 440															GREY RAL 7042		BLUE RAL 5015			
D	SERIE	Support CODES		DIMENSIONS (mm)								Bearing load (N)			Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF		C	CO	(N)	Closed type	Open type	Closed type	Open type
20	UCF 204	80514	84636	63,5	90	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600	16500	80254	80255	87259	83901
25	UCF 205	80515	84637	70	99	10,5	22	17	36	47	49	50	45	9150	7800	17000	80075	80076	85384	85385
30	UCF 206	80976	84638	83	113	10,5	26	20	41	54	56	60	50	12500	11200	17500	80011	80053	84100	80354
30	MUCF 206	84044	84639	83	113	10,5	26	20	41	65	68	60	50	12500	11200	17500	80256	80494	83088	87271
35	UCF 207	81052	84640	92	122	10,5	26	20	45	57	59	70	55	16600	15300	18000	80077	80078	80969	80275
35	MUCF 207	83468	84641	83	113	10,5	26	19,5	45	65	68	70	55	16600	15300	18000	80256	80495	83088	87277
40	UCF 208	80695	84642	102	133	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	80256	80257	83088	86722
40	MUCF 208	81045	84643	83	113	10,5	26	19,5	48,5	65	68	78	65	20000	19000	18000	80256	80257	83088	86722

VERSIONS WITH MEASURES IN INCHES

CHROME STEEL BEARING															GREY RAL 7042		BLUE RAL 5015			
D (inches) (mm)	SERIE	Support CODES		DIMENSIONS (mm)								Bearing load (N)			Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF		C	CO	(N)	Closed type	Open type	Closed type	Open type
1" 25,4	UCF 205	84496	84887	70	99	10,5	22	17	36	47	49	50	45	14000	7800	17000	80075	85202	85384	87273
1 1/4" 31,75	UCF 206	84497	84888	83	113	10,5	26	20	41	54	56	60	50	19500	11300	17500	80011	85203	84100	87274
1 1/4" 31,75	MUCF 206	84498	85183	83	113	10,5	26	20	41	65	68	60	50	19500	11300	17500	80256	85204	83088	87275

MATERIALS: Support made out of PA + glass fiber black or white colour; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCF/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




Square flanged bearing supports

Serie **UCF/CS**
Serie **MUCF/CS**



Back gasket for shouldered shaft

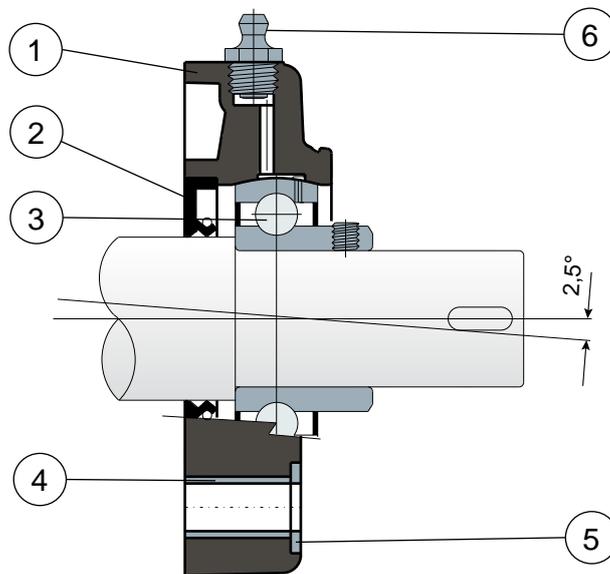

- 1) Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Square flanged bearing supports

Technical data

Serie **UCF/CS**
Serie **MUCF/CS**

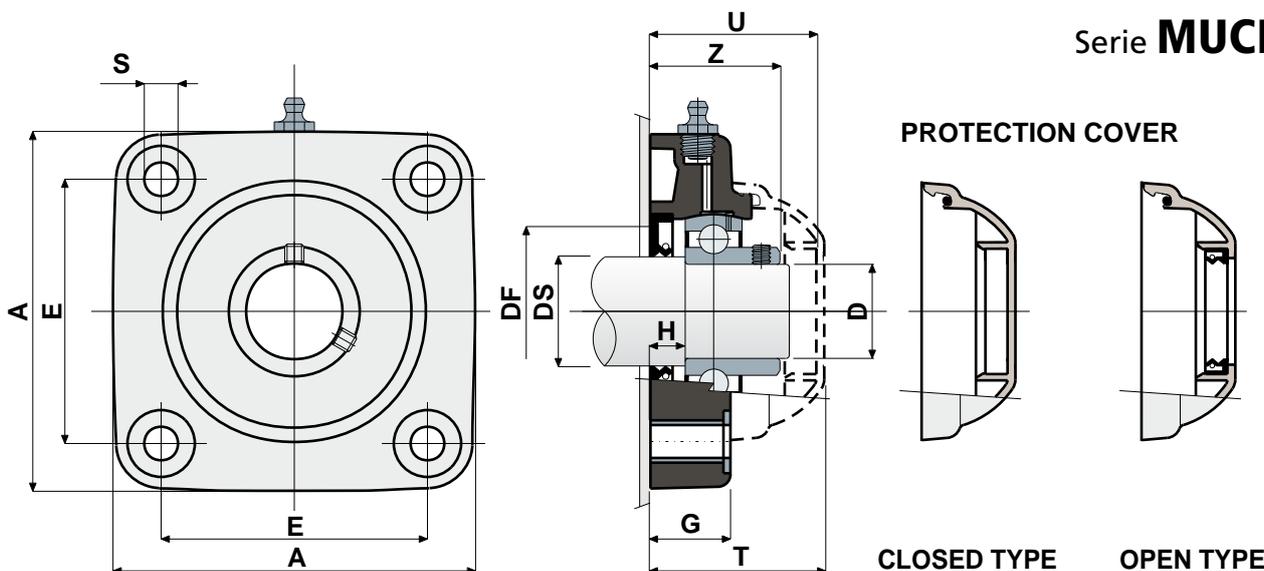

CHROME STEEL BEARING																	GREY RAL 7042	BLUE RAL 5015					
DS	D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)			Bearing support load		COVER CODES		COVER CODES	
			Black colour	White colour	E	A	S	G	H	Z	U	T	DF		C	CO	(N)	Closed type	Open type	Closed type	Open type		
25	20	UCF 204 CS	80260	85246	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	16500	80254	80255	87259	83901		
30	25	UCF 205 CS	80178	85247	70	99	10,5	22	10	36	47	49	50	45	14000	7800	17000	80075	80076	85384	85385		
35	30	UCF 206 CS	80179	85248	83	113	10,5	26	11,5	41	54	56	60	50	19500	11300	17500	80011	80053	84100	80354		
35	30	MUCF 206 CS	84045	85249	83	113	10,5	26	11,5	41	65	68	60	50	19500	11300	17500	80256	80494	83088	87271		
40	35	UCF 207 CS	80180	85250	92	122	10,5	26	10,5	45	57	59	70	55	25500	15300	18000	80077	80078	80969	80275		
40	35	MUCF 207 CS	84046	85251	83	122	10,5	26	10,5	45	65	68	70	55	25500	15300	18000	80256	80495	83088	87277		
45	40	UCF 208 CS	80261	85252	102	133	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	80256	80257	83088	86722		
45	40	MUCF 208 CS	80713	85253	83	113	10,5	26	9	48,5	65	68	78	65	32500	19800	18000	80256	80257	83088	86722		

STAINLESS STEEL BEARING AISI 440																	GREY RAL 7042	BLUE RAL 5015					
DS	D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)			Bearing support load		COVER CODES		COVER CODES	
			Black colour	White colour	E	A	S	G	H	Z	U	T	DF		C	CO	(N)	Closed type	Open type	Closed type	Open type		
25	20	UCF 204 CS	83520	85254	63,5	90	10,5	19	8,5	33,5	44	46,5	45	40	8300	6600	16500	80254	80255	87259	83901		
30	25	UCF 205 CS	84146	85255	70	99	10,5	22	10	36	47	49	50	45	9150	7800	17000	80075	80076	85384	85385		
35	30	UCF 206 CS	83829	85256	83	113	10,5	26	11,5	41	54	56	60	50	12500	11200	17500	80011	80053	84100	80354		
35	30	MUCF 206 CS	85259	85261	83	113	10,5	26	11,5	41	65	68	60	50	12500	11200	17500	80256	80494	83088	87271		
40	35	UCF 207 CS	84147	85257	92	122	10,5	26	10,5	45	57	59	70	55	16600	15300	18000	80077	80078	80969	80275		
40	35	MUCF 207 CS	85260	85262	83	122	10,5	26	10,5	45	65	68	70	55	16600	15300	18000	80256	80495	83088	87277		
45	40	UCF 208 CS	80322	85258	102	133	10,5	26	9	48,5	65	68	78	65	20000	19000	18000	80256	80257	83088	86722		
45	40	MUCF 208 CS	83828	85263	83	113	10,5	26	9	48,5	65	68	78	65	20000	19000	18000	80256	80257	83088	86722		

MATERIALS: Support made out of PA + glass fiber black or white colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: Back gasket for shouldered shafts; protection cover can be ordered separately as accessory. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.



Square flanged bearing supports

Serie **UCF/CA**




NEW



On request covers in polypropylene blue colour Ral 5015.

External cover made out of stainless steel AISI 304

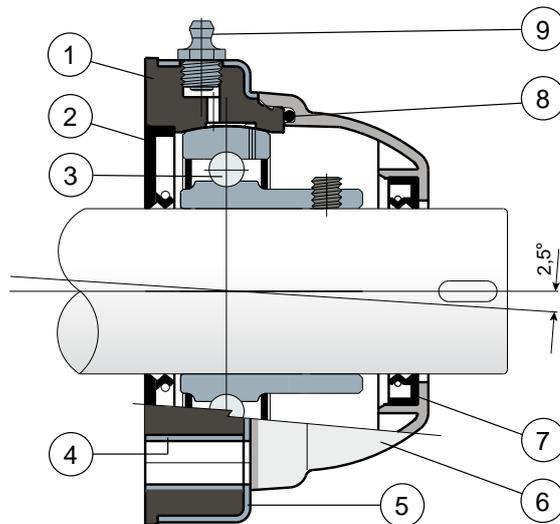

- 1) Internal body of support made out of black polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Square flanged bearing supports

Technical data

Serie **UCF/CA**

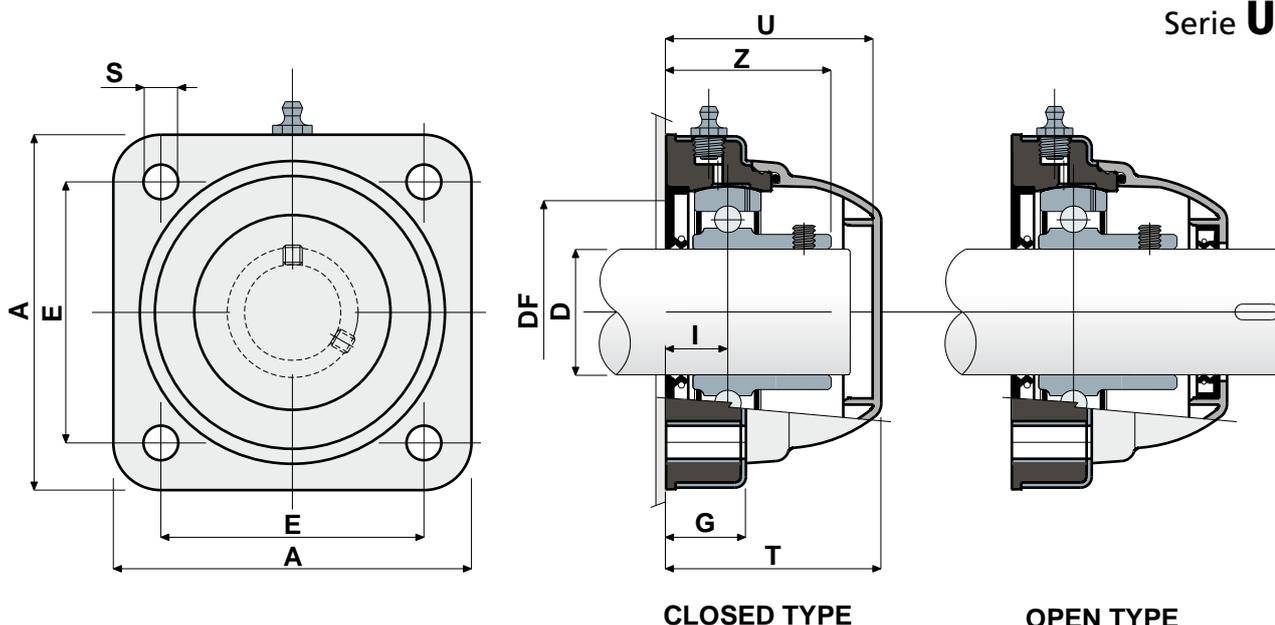

D (mm)	SERIE	CODES		DIMENSIONS (mm)								DF		Bearing load (N)		Bearing support load (N)
		Closed type	Open type	E	A	S	G	I	Z	U	T	DF		C	C0	
												Max	Min			
30	UCF 206 CA	80409	80410	83	113	11	27	20	41	65	68	60	50	19500	11300	17500
35	UCF 207 CA	80485	80486	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000
40	UCF 208 CA	80411	80412	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000

D (mm)	SERIE	CODES		DIMENSIONS (mm)								DF		Bearing load (N)		Bearing support load (N)
		Closed type	Open type	E	A	S	G	I	Z	U	T	DF		C	C0	
												Max	Min			
30	UCF 206 CA	80453	80464	83	113	11	27	20	41	65	68	60	50	12500	11200	17500
35	UCF 207 CA	81059	81060	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000
40	UCF 208 CA	80454	81061	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000

VERSIONS WITH MEASURES IN INCHES

D (inches)	D (mm)	SERIE	CODES		DIMENSIONS (mm)								DF		Bearing load (N)		Bearing support load (N)
			Closed type	Open type	E	A	S	G	I	Z	U	T	DF		C	C0	
													Max	Min			
1"1/4	31,75	UCF 206 CA	84499	84503	83	113	11	27	20	41	65	68	60	50	19500	11300	17500

MATERIALS: Support made out of black colour PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanitation. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Protection covers in different colours and with customized brand; box quantity according to your request; internal body in reinforced polypropylene white colour; Viton gaskets, "Long life" bearings.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




Square flanged bearing supports

Serie **UCF/CXA**



External cover made out of stainless steel AISI 304; without protection cover

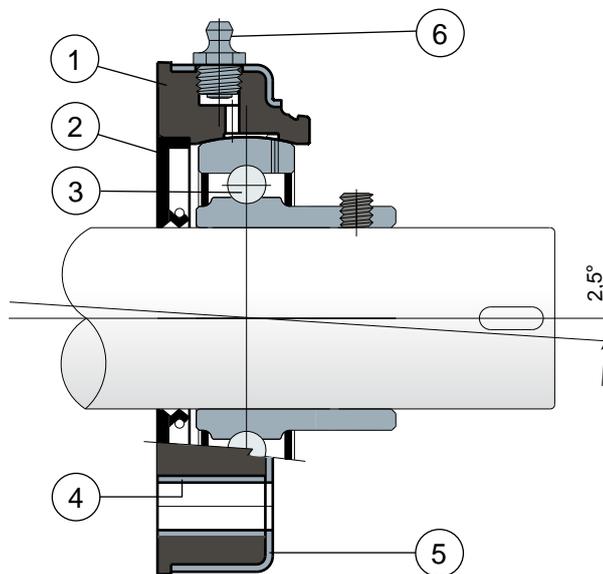

- 1) Internal body of support made out of black polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCF/CA series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Square flanged bearing supports

Technical data

Serie **UCF/CXA**

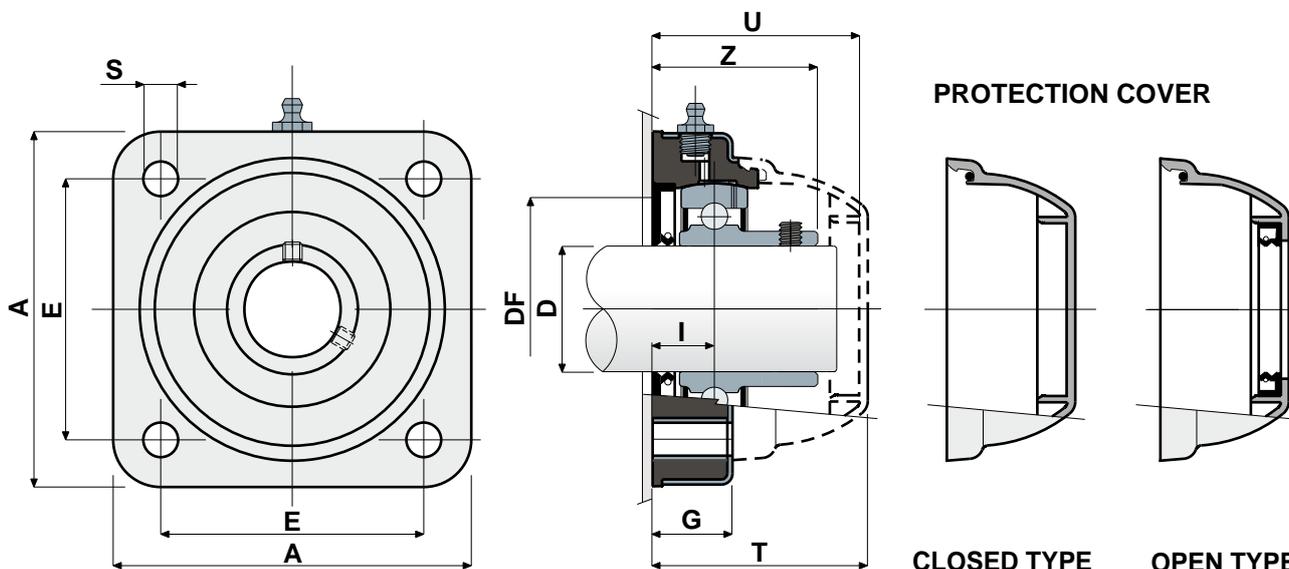

D (mm)	SERIE	Support CODES	CHROME STEEL BEARING										GREY RAL 7042			BLUE RAL 5015				
			DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type	Closed type	Open type	
30	UCF 206 CXA	80413	83	113	11	27	20	41	65	68	60	50	19500	11300	17500			80494	87271	
35	UCF 207 CXA	80479	83	113	11	27	19,5	45	65	68	70	55	25500	15300	18000	80256	80495	83088	87277	
40	UCF 208 CXA	80414	83	113	11	27	19,5	48,5	65	68	78	65	32500	19800	18000			80257	86722	

D (mm)	SERIE	Support CODES	STAINLESS STEEL BEARING AISI 440										GREY RAL 7042			BLUE RAL 5015				
			DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
			E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type	Closed type	Open type	
30	UCF 206 CXA	80499	83	113	11	27	20	41	65	68	60	50	12500	11200	17500			80494	87271	
35	UCF 207 CXA	80500	83	113	11	27	19,5	45	65	68	70	55	16600	15300	18000	80256	80495	83088	87277	
40	UCF 208 CXA	80501	83	113	11	27	19,5	48,5	65	68	78	65	20000	19000	18000			80257	86722	

VERSIONS WITH MEASURES IN INCHES

D (inches)	D (mm)	SERIE	Support CODES	CHROME STEEL BEARING										GREY RAL 7042			BLUE RAL 5015				
				DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
				E	A	S	G	I	Z	U	T	DF		C	C0	(N)	Closed type	Open type	Closed type	Open type	
1 1/4	31,75	UCF 206 CXA	84505	83	113	11	27	20	41	65	68	60	50	19500	11300	17500	80256	85204	83088	87275	

MATERIALS: Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042 or blue Ral 5015.

FEATURES: The only difference from UCF/CA series is lack of protection cover, which can be ordered separately as an accessory. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Protection covers in different colours and with customized brand; internal body in reinforced polypropylene white colour; box quantity according to your request; Viton gaskets, "Long life" bearings.



Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.



Oval flanged bearing supports


Serie **UCFL/C**

Serie **MUCFL/C**



On request covers in polypropylene blue colour Ral 5015.

Full protection of bearing

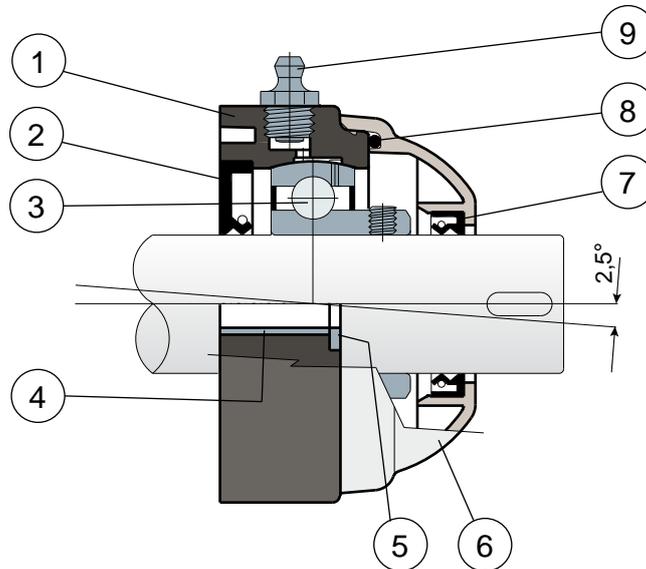

- 1) Support body made out of black or white colour polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.


Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.



Oval flanged bearing supports

Technical data

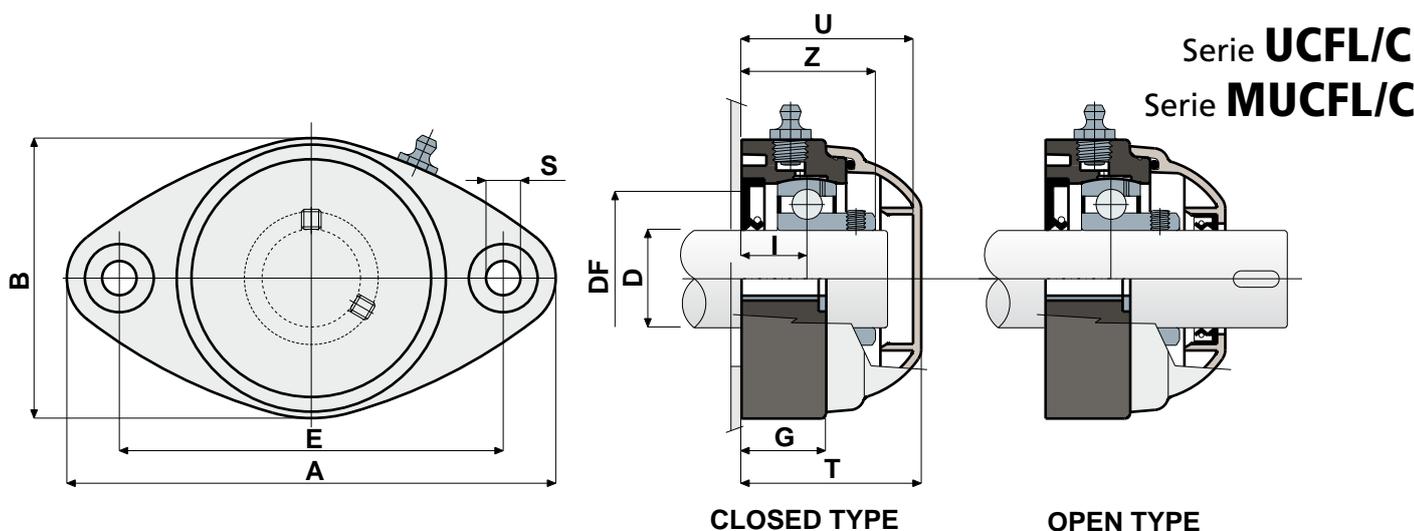

Serie **UCFL/C**
Serie **MUCFL/C**

CHROME STEEL BEARING																			
D	SERIE	CODES				DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)	
		Black colour		White colour		E	A	B	S	G	I	Z	U	T	DF		C		CO
		Closed type	Open type	Closed type	Open type										Max	Min			
20	UCFL 204 C	80262	80263	84644	84645	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500
20	MUCFL 204 C	82858	82857	84676	84677	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500
20	MUCFL 204 C	87211	87212	87213	87214	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500
25	UCFL 205 C	80067	80071	84646	84647	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
25	MUCFL 205 C	82860	82859	84678	84679	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
30	UCFL 206 C	80068	80072	84648	84649	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
30	MUCFL 206 C	82409	82408	84680	84681	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000
35	UCFL 207 C	80069	80073	84650	84651	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000
35	MUCFL 207 C	84014	83989	84682	84683	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000
40	UCFL 208 C	85217	85218	85221	85222	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000
40	MUCFL 208 C	84015	83990	84684	84685	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440																			
D	SERIE	CODES				DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)	
		Black colour		White colour		E	A	B	S	G	I	Z	U	T	DF		C		CO
		Closed type	Open type	Closed type	Open type										Max	Min			
20	UCFL 204 C	81062	81063	84652	84653	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600	8500
20	MUCFL 204 C	82870	82869	84686	84687	90	122	86	10,5	19	16	34	44	46,5	45	40	8300	6600	8500
20	MUCFL 204 C	87221	87222	87223	87224	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	8300	6600	8500
25	UCFL 205 C	81064	81065	84654	84655	99	131	72	10,5	22	17	36	47	49	50	45	9150	7800	10000
25	MUCFL 205 C	82868	82867	84688	84689	90	122	86	10,5	19	15,5	35	44	46,5	50	45	9150	7800	10000
30	UCFL 206 C	81066	81067	84656	84657	117	149	86	10,5	26	20	41	54	56	60	50	12500	11200	13000
30	MUCFL 206 C	82767	82766	84690	84691	90	122	86	10,5	19	13	35	52	54,5	60	50	12500	11200	13000
35	UCFL 207 C	81068	81069	84658	84659	130	163	94	10,5	26	20	45	57	59	70	55	16600	15300	14000
35	MUCFL 207 C	84017	84018	84692	84693	117	147	112	10,5	27	20	45,3	57	59,6	70	55	16600	15300	14000
40	UCFL 208 C	85219	85220	85223	85224	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	20000	19000	15000
40	MUCFL 208 C	84016	83991	84694	84695	117	147	112	10,5	27	20	48,5	65,5	68	78	65	20000	19000	15000

VERSIONS WITH MEASURES IN INCHES

CHROME STEEL BEARING																			
D	SERIE	CODES				DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)	
		Black colour		White colour		E	A	B	S	G	I	Z	U	T	DF		C		CO
		Closed type	Open type	Closed type	Open type										Max	Min			
1" (25,4)	UCFL 205 C	84506	84507	84891	84892	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000
1" (25,4)	MUCFL 205 C	84515	84539	84979	84980	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000
1 1/4" (31,75)	UCFL 206 C	84508	84509	84893	84894	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000
1 1/4" (31,75)	MUCFL 206 C	84516	84540	84981	84982	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000

MATERIALS: Support made out of black or white colour PA + glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Oval flanged bearing supports

Serie **UCFL/CX**
Serie **MUCFL/CX**



Without protection cover

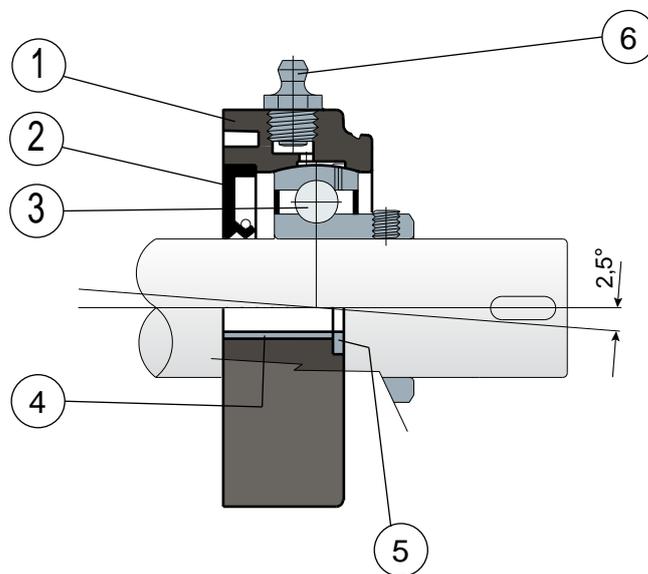

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCFL/C series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.


Maximum shaft alignment error 2,5°

For further information please contact our technical office or sales department.



Oval flanged bearing supports

Technical data

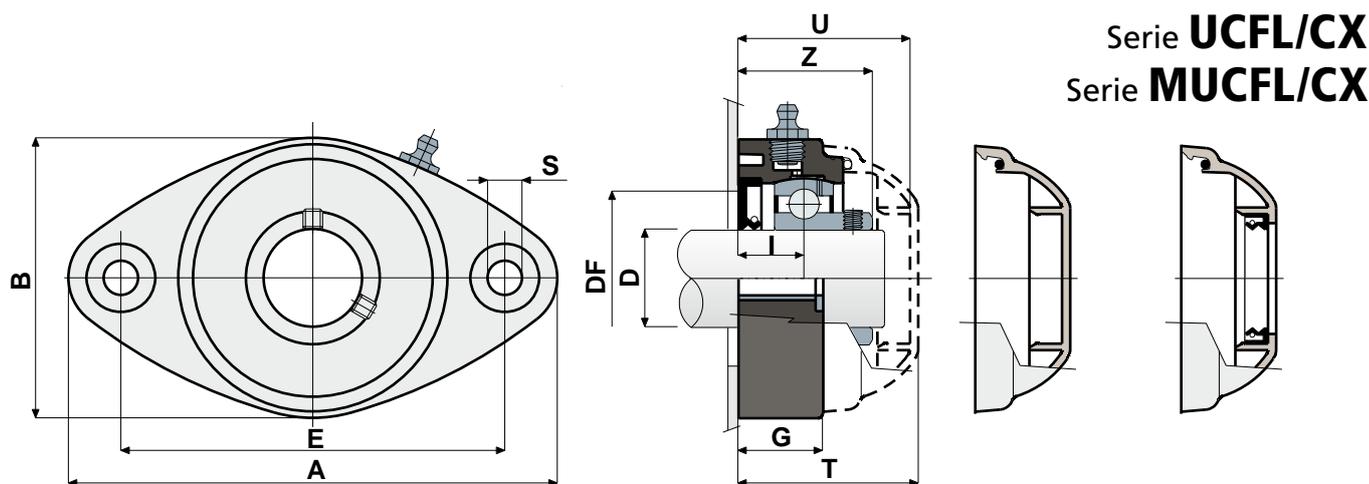

Serie **UCFL/CX**
Serie **MUCFL/CX**

CLOSED TYPE **OPEN TYPE**

CHROME STEEL BEARING															GREY RAL 7042		BLUE RAL 5015				
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	S	G	I	Z	U	T	DF Max	DF Min	C	C0	(N)	Closed type	Open type	Closed type	Open type
20	UCFL 204 CX	80264	84660	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255	87259	83901
20	MUCFL 204 CX	83035	84696	90	122	86	10,5	19	16	34	44	46,5	45	40	12800	6600	8500	80254	80255	87259	83901
20	MUCFL 204 CX	87215	87216	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255	87259	83901
25	UCFL 205 CX	80181	84661	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000	80075	80076	85384	85385
25	MUCFL 205 CX	83036	84697	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000	80075	80076	85384	85385
30	UCFL 206 CX	80182	84662	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000	80011	80053	84100	80354
30	MUCFL 206 CX	80540	84698	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000	82765	82764	87270	87272
35	UCFL 207 CX	80183	84663	130	163	94	10,5	26	20	45	57	59	70	55	25500	15300	14000	80077	80078	80969	80275
35	MUCFL 207 CX	83992	84699	117	147	112	10,5	27	20	45,3	57	59,6	70	55	25500	15300	14000	80077	80078	80969	80275
40	UCFL 208 CX	85225	85227	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	32500	19800	15000	80256	80257	83088	86722
40	MUCFL 208 CX	83993	84700	117	147	112	10,5	27	20	48,5	65,5	68	78	65	32500	19800	15000	80256	80257	83088	86722

STAINLESS STEEL BEARING AISI 440															GREY RAL 7042		BLUE RAL 5015				
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	S	G	I	Z	U	T	DF Max	DF Min	C	C0	(N)	Closed type	Open type	Closed type	Open type
20	UCFL 204 CX	81053	84664	90	118	64	10,5	19	15,5	33,5	44	46,5	45	40	8300	6600	8500	80254	80255	87259	83901
20	MUCFL 204 CX	83045	84701	90	122	86	10,5	19	16	34	44	46,5	45	40	8300	6600	8500	80254	80255	87259	83901
20	MUCFL 204 CX	87225	87226	76,5	100	70	10,5	11	15,5	33,5	44	46,5	45	40	8300	6600	8500	80254	80255	87259	83901
25	UCFL 205 CX	81054	84665	99	131	72	10,5	22	17	36	47	49	50	45	9150	7800	10000	80075	80076	85384	85385
25	MUCFL 205 CX	83046	84702	90	122	86	10,5	19	15,5	35	44	46,5	50	45	9150	7800	10000	80075	80076	85384	85385
30	UCFL 206 CX	81055	84666	117	149	86	10,5	26	20	41	54	56	60	50	12500	11200	13000	80011	80053	84100	80354
30	MUCFL 206 CX	83047	84703	90	122	86	10,5	19	13	35	52	54,5	60	50	12500	11200	13000	82765	82764	87270	87272
35	UCFL 207 CX	81056	84667	130	163	94	10,5	26	20	45	57	59	70	55	16600	15300	14000	80077	80078	80969	80275
35	MUCFL 207 CX	84019	84704	117	147	112	10,5	27	20	45,3	57	59,6	70	55	16600	15300	14000	80077	80078	80969	80275
40	UCFL 208 CX	85226	85228	144	172	100	10,5	27	19,5	48,5	65,5	71	78	65	20000	19000	15000	80256	80257	83088	86722
40	MUCFL 208 CX	83994	84705	117	147	112	10,5	27	20	48,5	65,5	68	78	65	20000	19000	15000	80256	80257	83088	86722

VERSIONS WITH MEASURES IN INCHES

CHROME STEEL BEARING															GREY RAL 7042		BLUE RAL 5015					
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES		
		Black colour	White colour	E	A	B	S	G	I	Z	U	T	DF Max	DF Min	C	C0	(N)	Closed type	Open type	Closed type	Open type	
1"	25,4	UCFL 205 CX	84510	84899	99	131	72	10,5	22	17	36	47	49	50	45	14000	7800	10000	80075	85202	85384	87273
1"	25,4	MUCFL 205 CX	84517	84983	90	122	86	10,5	19	15,5	35	44	46,5	50	45	14000	7800	10000	80075	85202	85384	87273
1 1/4"	31,75	UCFL 206 CX	84511	84900	117	149	86	10,5	26	20	41	54	56	60	50	19500	11300	13000	80011	85203	84100	87274
1 1/4"	31,75	MUCFL 206 CX	84518	84984	90	122	86	10,5	19	13	35	52	54,5	60	50	19500	11300	13000	82765	85206	87270	87276

MATERIALS: Support made out of black or white colour PA + glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.
FEATURES: The difference from UCFL/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Oval flanged bearing supports

Serie **UCFL**

Serie **MUCFL**



Without cover and back gasket

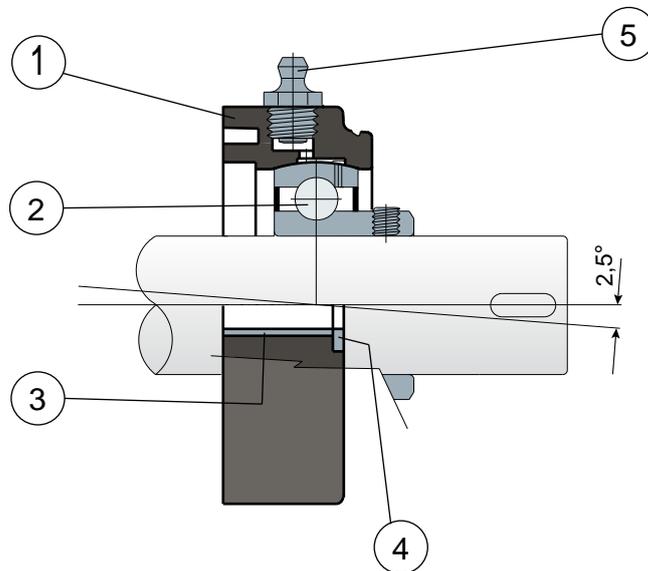

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCFL/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°



For further information please contact our technical office or sales department.




Oval flanged bearing supports

Technical data

Serie **UCFL**
Serie **MUCFL**

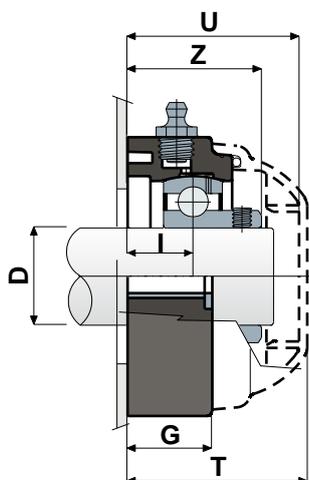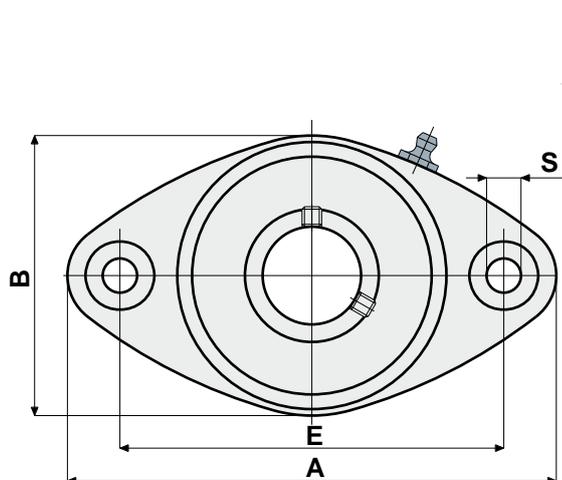

PROTECTION COVER



CLOSED TYPE OPEN TYPE

D	SERIE	CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type	Closed type	Open type		
20	UCFL 204	80265	84668	90	118	64	10,5	19	15,5	33,5	44	46,5	12800	6600	8500	80254	80255	87259	83901		
20	MUCFL 204	83037	84706	90	122	86	10,5	19	16	34	44	46,5	12800	6600	8500	80254	80255	87259	83901		
20	MUCFL 204	87217	87218	76,5	100	70	10,5	11	15,5	33,5	44	46,5	12800	6600	8500	80254	80255	87259	83901		
25	UCFL 205	80063	84669	99	131	72	10,5	22	17	36	47	49	14000	7800	10000	80075	80076	85384	85385		
25	MUCFL 205	83038	84707	90	122	86	10,5	19	15,5	35	44	46,5	14000	7800	10000	80075	80076	85384	85385		
30	UCFL 206	80064	84670	117	149	86	10,5	26	20	41	54	56	19500	11300	13000	80011	80053	84100	80354		
30	MUCFL 206	80542	84708	90	122	86	10,5	19	13	35	52	54,5	19500	11300	13000	82765	82764	87270	87272		
35	UCFL 207	80065	84671	130	163	94	10,5	26	20	45	57	59	25500	15300	14000	80077	80078	80969	80275		
35	MUCFL 207	83995	84709	117	147	112	10,5	27	20	45,3	57	59,6	25500	15300	14000	80077	80078	80969	80275		
40	UCFL 208	85229	85231	144	172	100	10,5	27	19,5	48,5	65,5	71	32500	19800	15000	80256	80257	83088	86722		
40	MUCFL 208	83996	84710	117	147	112	10,5	27	20	48,5	65,5	68	32500	19800	15000	80256	80257	83088	86722		

D	SERIE	STAINLESS STEEL BEARING AISI 440														GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type	Closed type	Open type		
20	UCFL 204	80519	84672	90	118	64	10,5	19	15,5	33,5	44	46,5	8300	6600	8500	80254	80255	87259	83901		
20	MUCFL 204	83048	84711	90	122	86	10,5	19	16	34	44	46,5	8300	6600	8500	80254	80255	87259	83901		
20	MUCFL 204	87227	87228	76,5	100	70	10,5	11	15,5	33,5	44	46,5	8300	6600	8500	80254	80255	87259	83901		
25	UCFL 205	80520	84673	99	131	72	10,5	22	17	36	47	49	9150	7800	10000	80075	80076	85384	85385		
25	MUCFL 205	83049	84712	90	122	86	10,5	19	15,5	35	44	46,5	9150	7800	10000	80075	80076	85384	85385		
30	UCFL 206	80521	84674	117	149	86	10,5	26	20	41	54	56	12500	11200	13000	80011	80053	84100	80354		
30	MUCFL 206	83050	84713	90	122	86	10,5	19	13	35	52	54,5	12500	11200	13000	82765	82764	87270	87272		
35	UCFL 207	80522	84675	130	163	94	10,5	26	20	45	57	59	16600	15300	14000	80077	80078	80969	80275		
35	MUCFL 207	84020	84714	117	147	112	10,5	27	20	45,3	57	59,6	16600	15300	14000	80077	80078	80969	80275		
40	UCFL 208	85230	85232	144	172	100	10,5	27	19,5	48,5	65,5	71	20000	19000	15000	80256	80257	83088	86722		
40	MUCFL 208	83997	84715	117	147	112	10,5	27	20	48,5	65,5	68	20000	19000	15000	80256	80257	83088	86722		

VERSIONS WITH MEASURES IN INCHES

D	SERIE	CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	S	G	I	Z	U	T	C	C0	(N)	Closed type	Open type	Closed type	Open type		
1"	25,4	UCFL 205	84513	84903	99	131	72	10,5	22	17	36	47	49	14000	7800	10000	80075	85202	85384	87273	
1"	25,4	MUCFL 205	84519	84985	90	122	86	10,5	19	15,5	35	44	46,5	14000	7800	10000	80075	85202	85384	87273	
1 1/4"	31,75	UCFL 206	84514	84904	117	149	86	10,5	26	20	41	54	56	19500	11300	13000	80011	85203	84100	87274	
1 1/4"	31,75	MUCFL 206	84520	84986	90	122	86	10,5	19	13	35	52	54,5	19500	11300	13000	82765	85206	87270	87276	

MATERIALS: Support made out of black or white colour PA + glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.
FEATURES: The difference from UCFL/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Oval flanged bearing supports

Serie **UCFL/CS**

Serie **MUCFL/CS**



Back gasket for shouldered shaft

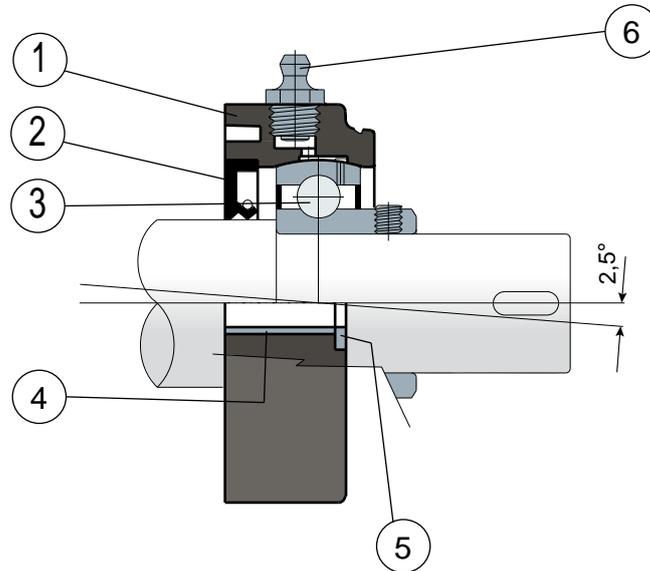

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Oval flanged bearing supports

Technical data

Serie **UCFL/CS**
Serie **MUCFL/CS**

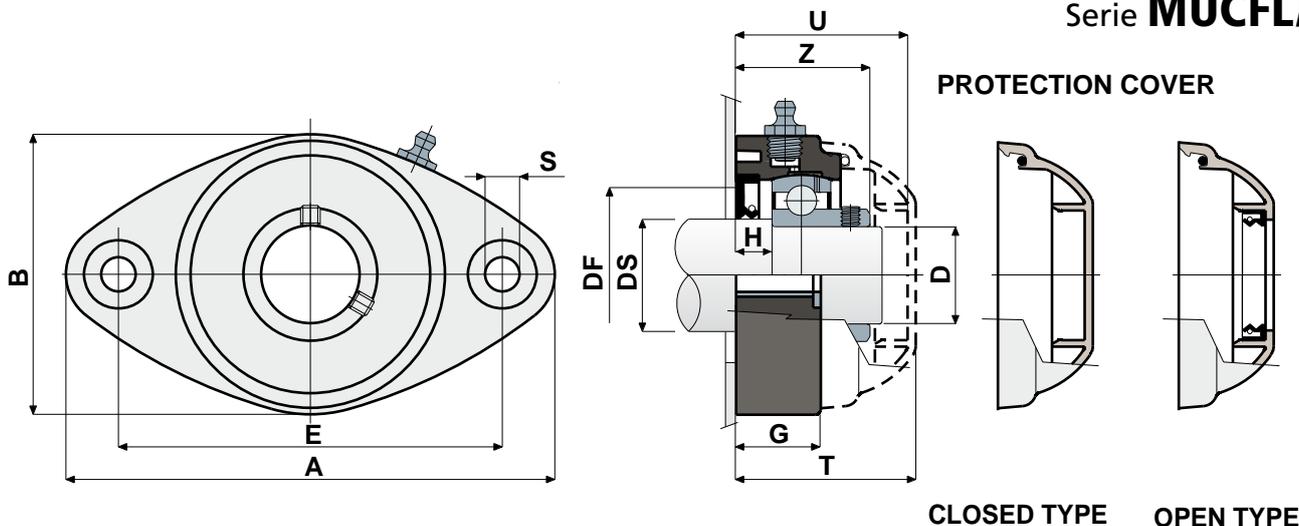

CHROME STEEL BEARING																	GREY RAL 7042	BLUE RAL 5015				
DS	D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
			Black colour	White colour	E	A	B	S	G	H	Z	U	T	DF Max	DF Min	C	CO	(N)	Closed type	Open type	Closed type	Open type
25	20	UCFL 204 CS	80266	85264	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255	87259	83901
25	20	MUCFL 204 CS	87219	87220	76,5	100	70	10,5	11	8,5	33,5	44	46,5	45	40	12800	6600	8500	80254	80255	87259	83901
30	25	UCFL 205 CS	80184	85265	99	131	72	10,5	22	10	36	47	49	50	45	14000	7800	10000	80075	80076	85384	85385
35	30	UCFL 206 CS	80185	85266	117	149	86	10,5	26	11,5	41	54	56	60	50	19500	11300	13000	80011	80053	84100	80354
40	35	UCFL 207 CS	80186	85267	130	163	94	10,5	26	10,5	45	57	59	70	55	25500	15300	14000	80077	80078	80969	80275
45	40	UCFL 208 CS	85233	86004	144	172	100	10,5	27	8,5	48,5	65,5	71	78	65	32500	19800	15000	80256	80257	83088	86722

STAINLESS STEEL BEARING AISI 440																	GREY RAL 7042	BLUE RAL 5015				
DS	D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
			Black colour	White colour	E	A	B	S	G	H	Z	U	T	DF Max	DF Min	C	CO	(N)	Closed type	Open type	Closed type	Open type
25	20	UCFL 204 CS	84148	85268	90	118	64	10,5	19	8,5	33,5	44	46,5	45	40	8300	6600	8500	80254	80255	87259	83901
25	20	MUCFL 204 CS	87229	87230	76,5	100	70	10,5	11	8,5	33,5	44	46,5	45	40	8300	6600	8500	80254	80255	87259	83901
30	25	UCFL 205 CS	83907	85269	99	131	72	10,5	22	10	36	47	49	50	45	9150	7800	10000	80075	80076	85384	85385
35	30	UCFL 206 CS	80523	85270	117	149	86	10,5	26	11,5	41	54	56	60	50	12500	11200	13000	80011	80053	84100	80354
40	35	UCFL 207 CS	84150	85271	130	163	94	10,5	26	10,5	45	57	59	70	55	16600	15300	14000	80077	80078	80969	80275
45	40	UCFL 208 CS	85234	86005	144	172	100	10,5	27	8,5	48,5	65,5	71	78	65	20000	19000	15000	80256	80257	83088	86722

MATERIALS: Support made out of PA + glass fiber black or white colour; chrome steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: Back gasket for shouldered shafts; protection cover can be ordered separately as accessory. Use of shouldered shafts allows a higher capability of axial load. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



Oval flanged bearing supports

Serie **UCFL/CA**




NEW



On request covers in polypropylene blue colour Ral 5015.

External cover made out of stainless steel AISI 304

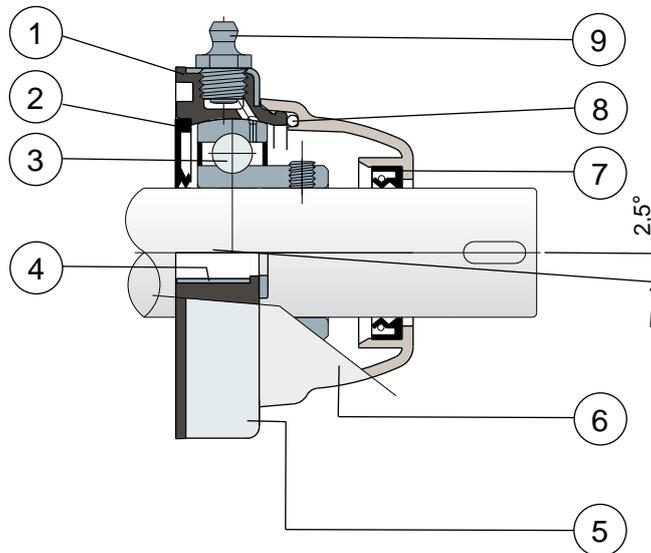

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Oval flanged bearing supports

Technical data

Serie **UCFL/CA**

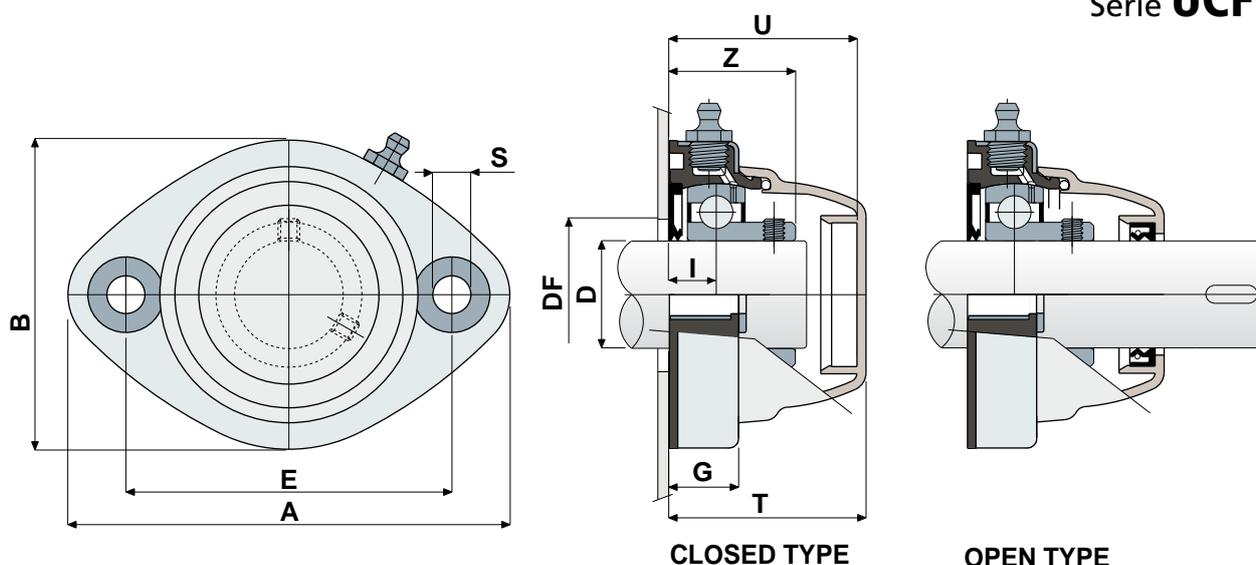

CHROME STEEL BEARING																	
D (mm)	SERIE	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)	
		Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C		CO
30	UCFL 206 CA	84021	83999	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000
35	UCFL 207 CA	84022	84000	117	147	112	11	27	20	45,3	65,5	68	70	55	25500	15300	14000
40	UCFL 208 CA	84023	84001	117	147	112	11	27	20	48,5	65,5	68	78	65	32500	19800	15000

STAINLESS STEEL BEARING AISI 440																	
D (mm)	SERIE	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)	
		Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C		CO
30	UCFL 206 CA	84024	84002	117	147	112	11	27	21	42	65,5	68	60	50	12500	11200	13000
35	UCFL 207 CA	84006	84003	117	147	112	11	27	20	45,3	65,5	68	70	55	16600	15300	14000
40	UCFL 208 CA	84010	84005	117	147	112	11	27	20	48,5	65,5	68	78	65	20000	19000	15000

VERSIONS WITH MEASURES IN INCHES

CHROME STEEL BEARING																		
D (inches)	D (mm)	SERIE	CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)	
			Closed type	Open type	E	A	B	S	G	I	Z	U	T	DF		C		CO
1"1/4	31,75	UCFL 206 CA	84521	84541	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000

MATERIALS: Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Protection covers in different colours and with customized brand; internal body in reinforced polypropylene white colour; box quantity according to your request; Viton gaskets, "Long life" bearings.

Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.




Oval flanged bearing supports

Serie **UCFL/CXA**



External cover made out of stainless steel AISI 304; without protection cover

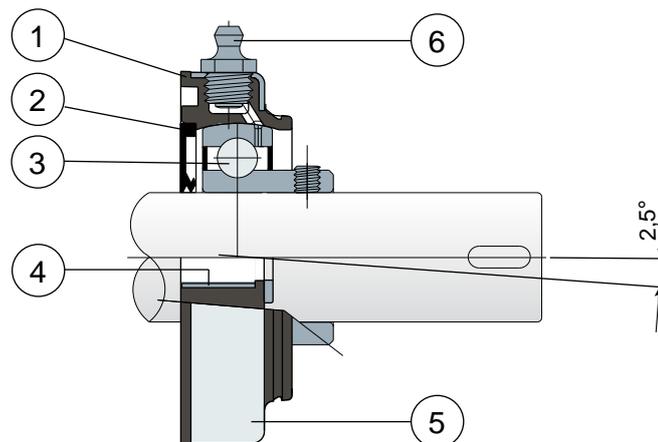

- 1) Internal body of support made out of polypropylene reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) External cover of support made out of AISI 304 stainless steel.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCFL/CA series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Oval flanged bearing supports

Technical data

Serie **UCFL/CXA**

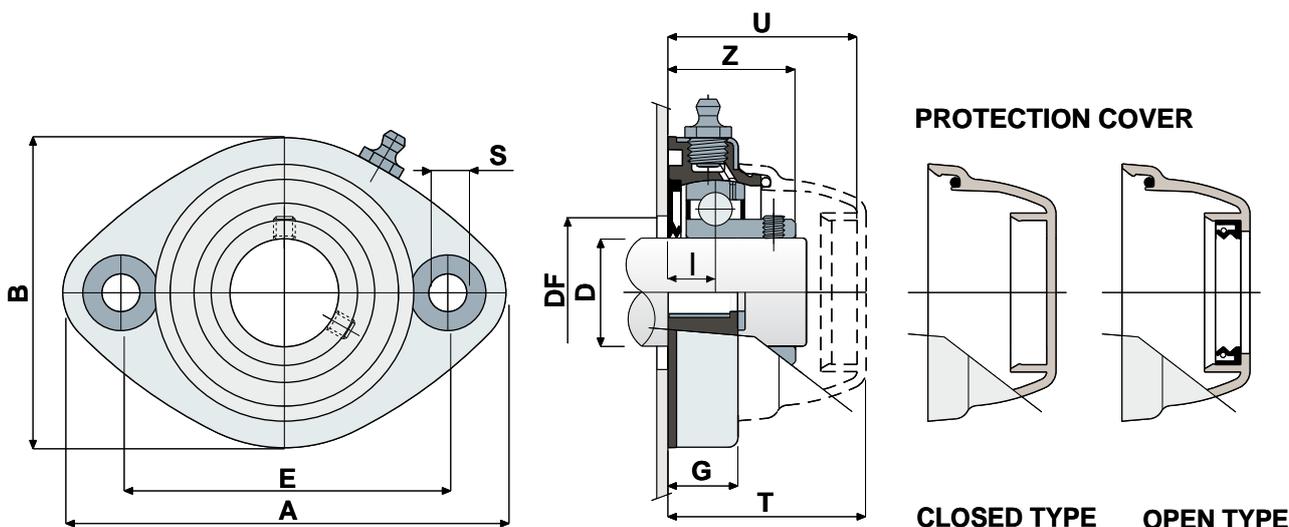

D (mm)	SERIE	Support CODES	CHROME STEEL BEARING											GREY RAL 7042		BLUE RAL 5015					
			DIMENSIONS (mm)											Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	CO	(N)	Closed type	Open type	Closed type	Open type	
30	UCFL 206 CXA	84007	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000			80494	87271	
35	UCFL 207 CXA	84008	117	147	112	11	27	20	45,3	65,5	68	70	55	25500	15300	14000	80256	80495	83088	87277	
40	UCFL 208 CXA	84009	117	147	112	11	27	20	48,5	65,5	68	78	65	32500	19800	15000			80257	86722	

D (mm)	SERIE	Support CODES	STAINLESS STEEL BEARING AISI 440											GREY RAL 7042		BLUE RAL 5015					
			DIMENSIONS (mm)											Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
			E	A	B	S	G	I	Z	U	T	DF		C	CO	(N)	Closed type	Open type	Closed type	Open type	
30	UCFL 206 CXA	84011	117	147	112	11	27	21	42	65,5	68	60	50	12500	11200	13000			80494	87271	
35	UCFL 207 CXA	84012	117	147	112	11	27	20	45,3	65,5	68	70	55	16600	15300	14000	80256	80495	83088	87277	
40	UCFL 208 CXA	84013	117	147	112	11	27	20	48,5	65,5	68	78	65	20000	19000	15000			80257	86722	

VERSIONS WITH MEASURES IN INCHES

D (inches)	D (mm)	SERIE	Support CODES	CHROME STEEL BEARING											GREY RAL 7042		BLUE RAL 5015					
				DIMENSIONS (mm)											Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
				E	A	B	S	G	I	Z	U	T	DF		C	CO	(N)	Closed type	Open type	Closed type	Open type	
1"1/4	31,75	UCFL 206 CXA	84522	117	147	112	11	27	21	42	65,5	68	60	50	19500	11300	13000	80256	85204	83088	87275	

MATERIALS: Support made out of PP + glass fiber; external cover of support made out of AISI 304 stainless steel; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings made out of AISI 304 stainless steel; gaskets made out of NBR rubber; protection cover made out of polypropylene grey colour RAL 7042 or blue Ral 5015.

FEATURES: The only difference from UCFL/CA series is lack of protection cover, which can be ordered separately as an accessory. Support body made out of polypropylene covered by an AISI 304 stainless steel later, to obtain the maximum chemical resistance to antibacterial detergents used in food processing field. More over this part is moulded without internal cavities in order to obtain the best sanification. Assembly with not shouldered shaft. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Protection covers in different colours and with customized brand; internal body in reinforced polypropylene white colour; box quantity according to your request; Viton gaskets, "Long life" bearings.

S Self-aligning bearings with Solid body: completely closed surface to guarantee the max hygiene.



Side flanged bearing supports

Serie **UCFB/C**




NEW



On request covers in polypropylene blue colour Ral 5015.

Full protection of bearing

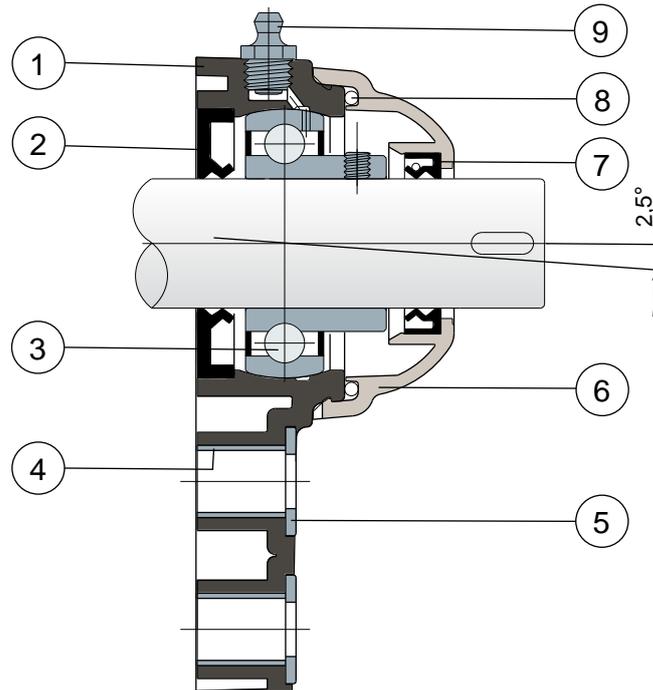

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber
- 9) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Side flanged bearing supports

Technical data

Serie **UCFB/C**

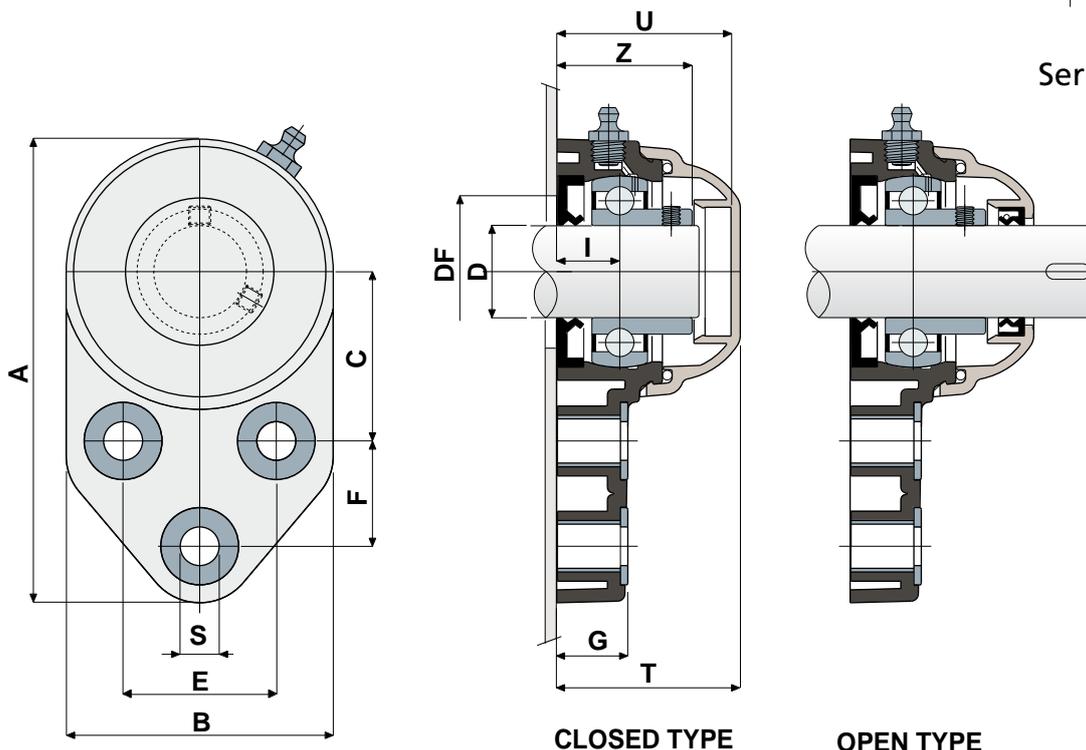

		CHROME STEEL BEARING																			
D	SERIE	CODES				DIMENSIONS (mm)													Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	
		Closed type	Open type	Closed type	Open type												Max	Min			
20	UCFB 204 C	82862	82861	84718	84719	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500
25	UCFB 205 C	82771	82770	84720	84721	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000
30	UCFB 206 C	84048	84049	84722	84723	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	19500	11300	11000
35	UCFB 207 C	84050	84051	84724	84725	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70	55	25500	15300	13000
40	UCFB 208 C	83031	83033	84726	84727	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000

		STAINLESS STEEL BEARING AISI 440																			
D	SERIE	CODES				DIMENSIONS (mm)													Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0	
		Closed type	Open type	Closed type	Open type												Max	Min			
20	UCFB 204 C	82866	82865	84728	84729	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45	40	8300	6600	8500
25	UCFB 205 C	82775	82774	84730	84731	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	9150	7800	9000
30	UCFB 206 C	84052	84053	84732	84733	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	12500	11200	11000
35	UCFB 207 C	84054	84055	84734	84735	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70	55	16600	15300	13000
40	UCFB 208 C	83040	83027	84736	84737	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	20000	19000	18000

VERSIONS WITH MEASURES IN INCHES

		CHROME STEEL BEARING																				
D	SERIE	CODES				DIMENSIONS (mm)													Bearing load (N)		Bearing support load (N)	
		Black colour		White colour		E	A	B	C	F	S	G	I	Z	U	T	DF		C	C0		
		(inches)	(mm)	Closed type	Open type												Closed type	Open type				Max
1"	25,4	UCFB 205 C	84523	84524	84907	84908	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000
1 1/4"	31,75	UCFB 206 C	84525	84526	84909	84910	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	19500	11300	11000

MATERIALS: Support made out of black or white colour PA + glass; chrome steel or stainless steel bearing, greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Side flanged bearing supports

Serie **UCFB/CX**



Without protection cover

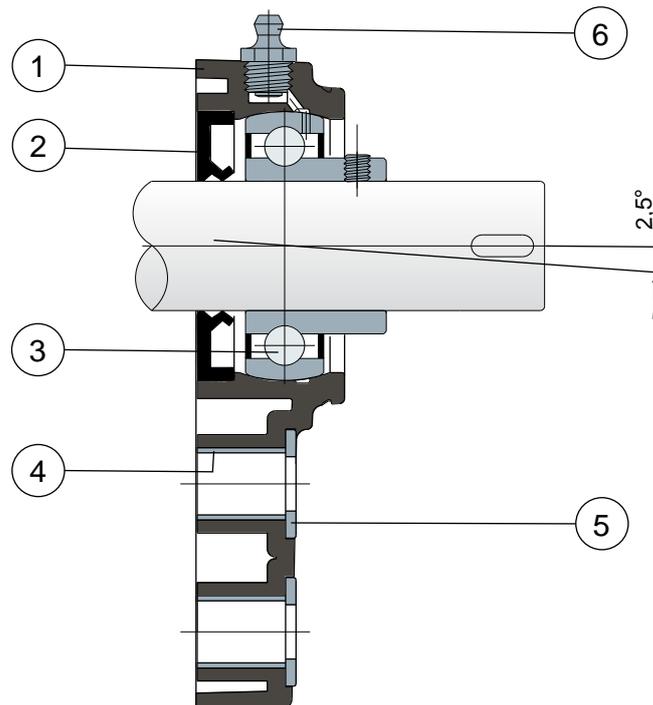

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCFB/C series is lack of protection cover, which can be ordered separately as an accessory.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Side flanged bearing supports

Technical data

Serie **UCFB/CX**

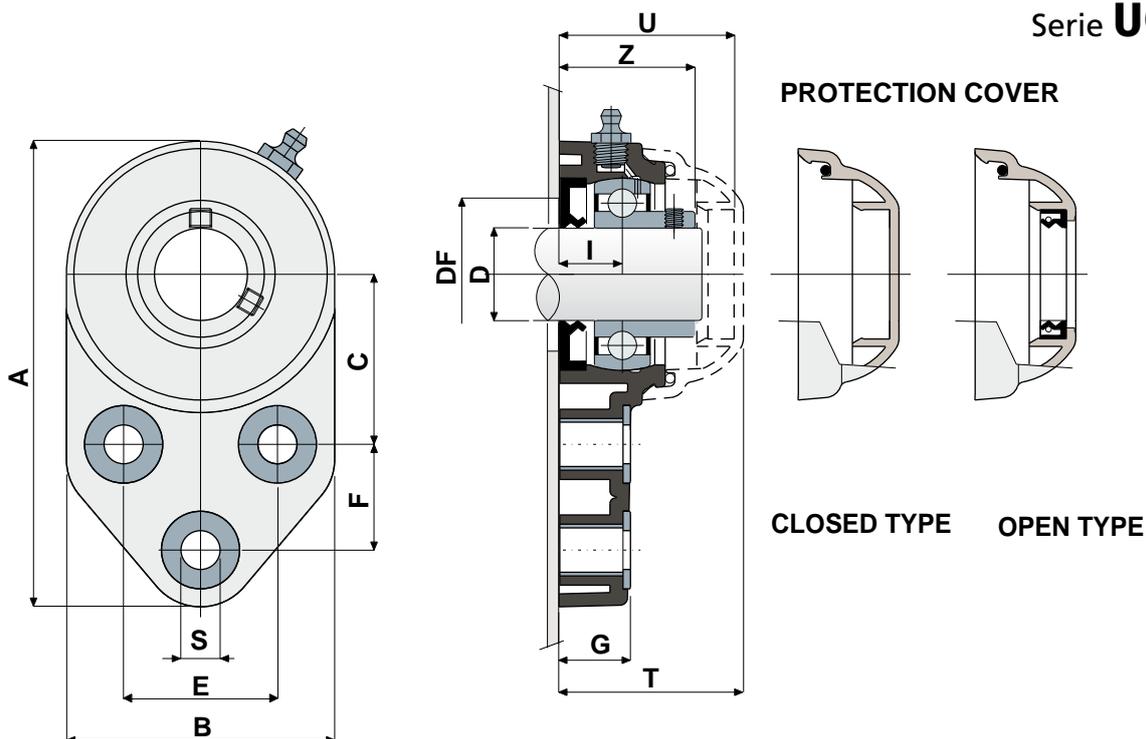

		CHROME STEEL BEARING																		GREY RAL 7042		BLUE RAL 5015				
D	SERIE	Support CODES		DIMENSIONS (mm)														DF		Bearing load (N)			COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	C	F	S	G	I	Z	U	T	Max	Min	C	CO	(N)	Closed type	Open type	Closed type	Open type			
20	UCFB 204 CX	83023	84738	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45	40	12800	6600	8500	80254	80255	87259	83901			
25	UCFB 205 CX	82772	84739	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	80075	80076	85384	85385			
30	UCFB 206 CX	84056	84740	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	19500	11200	11000	80011	80053	84100	80354			
35	UCFB 207 CX	84057	84741	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70	55	25500	15300	13000	80077	80078	80969	80275			
40	UCFB 208 CX	82478	84742	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	32500	19800	18000	80256	80257	83088	86722			

		STAINLESS STEEL BEARING AISI 440																		GREY RAL 7042		BLUE RAL 5015				
D	SERIE	Support CODES		DIMENSIONS (mm)														DF		Bearing load (N)			COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	C	F	S	G	I	Z	U	T	Max	Min	C	CO	(N)	Closed type	Open type	Closed type	Open type			
20	UCFB 204 CX	83039	84743	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	45	40	8300	6600	8500	80254	80255	87259	83901			
25	UCFB 205 CX	82776	84744	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	9150	7800	9000	80075	80076	85384	85385			
30	UCFB 206 CX	84058	84745	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	12500	11200	11000	80011	80053	84100	80354			
35	UCFB 207 CX	84059	84746	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	70	55	16600	15300	13000	80077	80078	80969	80275			
40	UCFB 208 CX	83041	84747	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	78	65	20000	19000	18000	80256	80257	83088	86722			

VERSIONS WITH MEASURES IN INCHES

		CHROME STEEL BEARING																		GREY RAL 7042		BLUE RAL 5015				
D	SERIE	Support CODES		DIMENSIONS (mm)														DF		Bearing load (N)			COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	C	F	S	G	I	Z	U	T	Max	Min	C	CO	(N)	Closed type	Open type	Closed type	Open type			
1"	25,4	UCFB 205 CX	84527	84915	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	50	45	14000	7800	9000	80075	85202	85384	87273		
1 1/4"	31,75	UCFB 206 CX	84528	84916	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	60	50	19500	11300	11000	80011	85203	84100	87274		

MATERIALS: Support made out of black or white PA + glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCFB/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.


ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.

Side flanged bearing supports

Serie **UCFB**



Without cover and back gasket

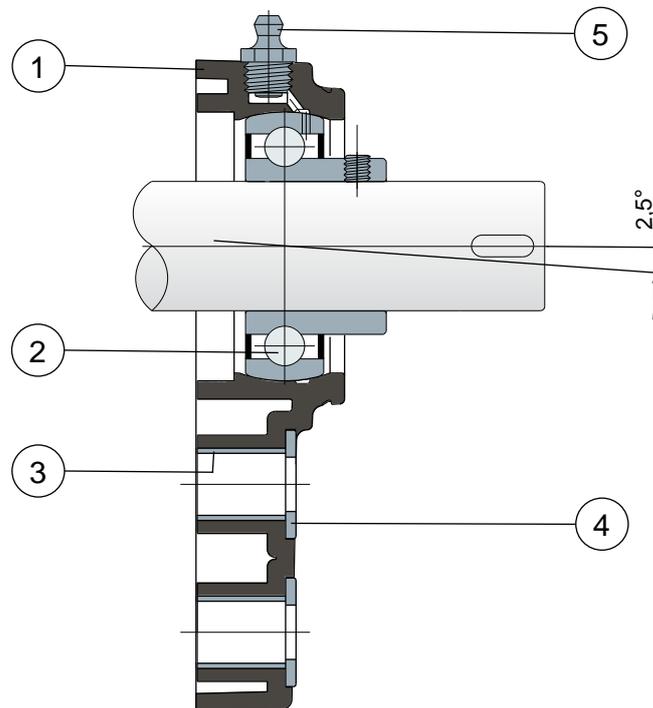

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCFB/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°


For further information please contact our technical office or sales department.



Side flanged bearing supports

Technical data

Serie **UCFB**

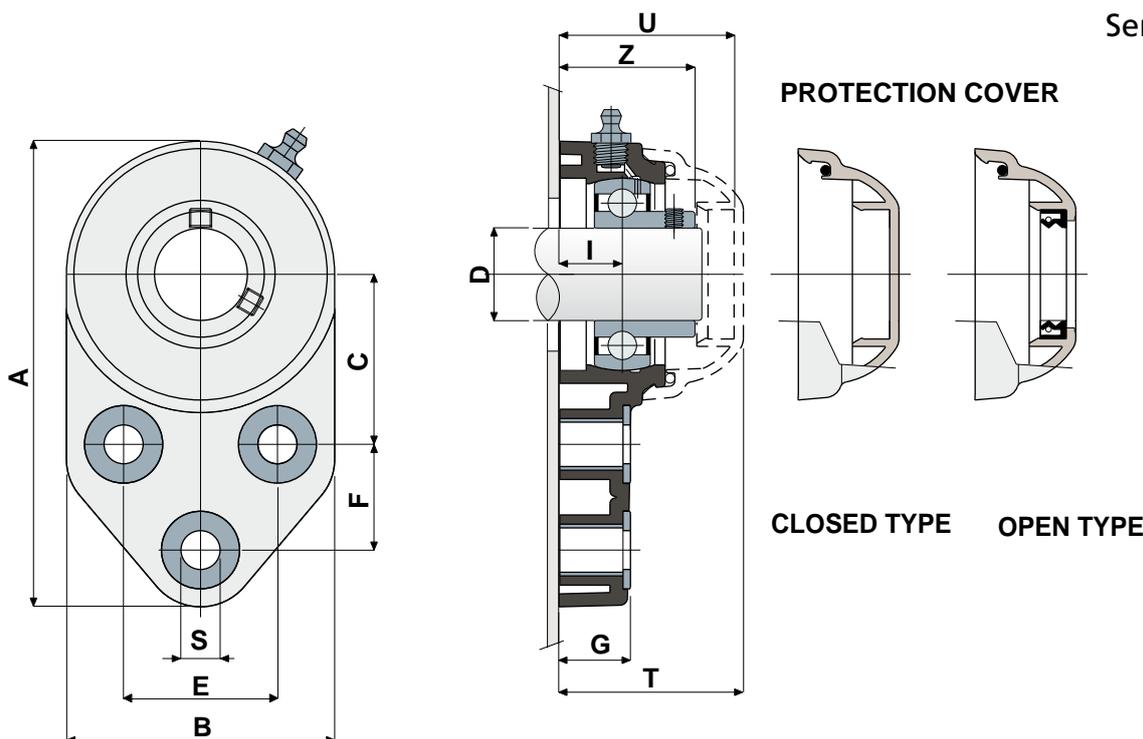

CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015					
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	C	F	S	G	I	Z	U	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
20	UCFB 204	83025	84748	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	12800	6600	8500	80254	80255	87259	83901
25	UCFB 205	82773	84749	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	14000	7800	9000	80075	80076	85384	85385
30	UCFB 206	84060	84750	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	19500	11200	11000	80011	80053	84100	80354
35	UCFB 207	84061	84751	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	25500	15300	13000	80077	80078	80969	80275
40	UCFB 208	83029	84752	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	32500	19800	18000	80256	80257	83088	86722

STAINLESS STEEL BEARING AISI 440														GREY RAL 7042		BLUE RAL 5015					
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	B	C	F	S	G	I	Z	U	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
20	UCFB 204	83042	84753	41,3	126	72	46	28,6	10,5	19	18	36	47	49,5	8300	6600	8500	80254	80255	87259	83901
25	UCFB 205	82777	84754	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	9150	7800	9000	80075	80076	85384	85385
30	UCFB 206	84062	84755	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	12500	11200	11000	80011	80053	84100	80354
35	UCFB 207	84063	84756	51	155	94	60,5	32	10,5	26,3	20	45,3	56,5	59	16600	15300	13000	80077	80078	80969	80275
40	UCFB 208	83044	84757	50	165	100	60,5	41	10,5	26,3	19,5	48,5	65,5	68	20000	19000	18000	80256	80257	83088	86722

VERSIONS WITH MEASURES IN INCHES

CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015						
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES		
		Black colour	White colour	E	A	B	C	F	S	G	I	Z	U	T	C	CO	(N)	Closed type	Open type	Closed type	Open type	
1"	25,4	UCFB 205	84529	84919	41,3	126	72	46	28,6	10,5	19	17	36,5	47	49,5	14000	7800	9000	80075	85202	85384	87273
1 1/4"	31,75	UCFB 206	84530	84920	47,6	142	85	52,4	32	10,5	26,3	20,7	41,7	53,2	55,7	19500	11300	11000	80011	85203	84100	87274

MATERIALS: Support made out of black or white colour PA + glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCFB/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2.5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



Pillow Blocks

Serie **UCP/C**




NEW



On request covers in polypropylene blue colour Ral 5015.



Full protection of bearing

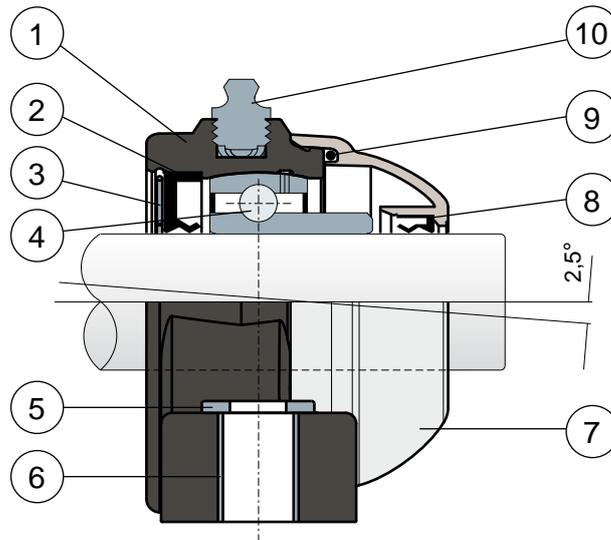

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Safety ring in stainless steel AISI 304.
- 4) Chrome steel or stainless steel bearing AISI 440.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 7) Protection cover made out of polypropylene (grey colour Ral 7042).
- 8) Front gasket made out of NBR rubber for turning shaft seal.
- 9) OR gasket made out of NBR rubber.
- 10) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Pillow Blocks

Technical data

Serie **UCP/C**

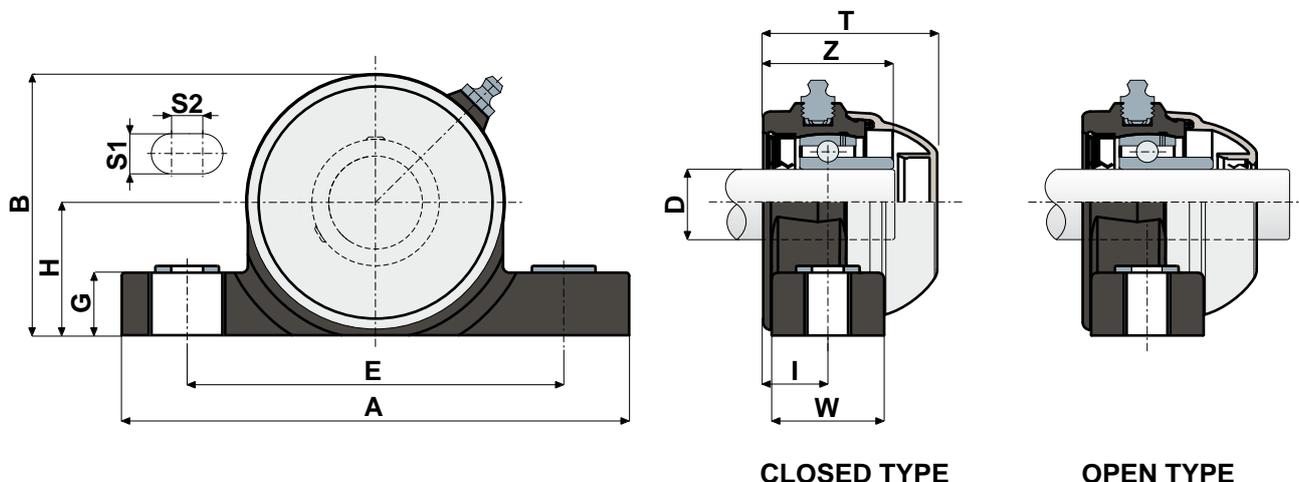

CHROME STEEL BEARING																			
D	SERIE	CODES				DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	
		Closed type	Open type	Closed type	Open type														
20	UCP 204 C	84076	84077	84758	84759	96	130	13	10	20	33,5	65,5	18	30	36	49	12800	6600	5750
25	UCP 205 C	83682	83683	84760	84761	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900
30	UCP 206 C	83684	83685	84762	84763	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11200	9200
35	UCP 207 C	83686	83687	84764	84765	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	25500	15300	11500
40	UCP 208 C	85441	85443	85445	85446	136	185	13	10	20	50	100	22,5	38,6	51,5	70,7	32500	19800	11500

STAINLESS STEEL BEARING AISI 440																			
D	SERIE	CODES				DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	
		Closed type	Open type	Closed type	Open type														
20	UCP 204 C	84078	84079	84766	84767	96	130	13	10	20	33,5	65,5	18	30	36	49	8300	6600	5750
25	UCP 205 C	83696	83697	84768	84769	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	9150	7800	6900
30	UCP 206 C	83698	83699	84770	84771	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	12500	11200	9200
35	UCP 207 C	83700	83701	84772	84773	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	16600	15300	11500
40	UCP 208 C	85447	85448	85449	85450	136	185	13	10	20	50	100	22,5	38,6	51,5	70,7	20000	19000	11500

VERSIONS WITH MEASURES IN INCHES

CHROME STEEL BEARING																			
D (inches) (mm)	SERIE	CODES				DIMENSIONS (mm)											Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	S1	S2	G	H	B	I	W	Z	T	C	C0	
		Closed type	Open type	Closed type	Open type														
1" 25,4	UCP 205 C	84531	84532	84923	84924	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900
1" 1/4 31,75	UCP 206 C	84533	84534	84925	84926	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11300	9200

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings, washers and safety ring made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Pillow Blocks

Serie **UCP/CX**



Without protection cover

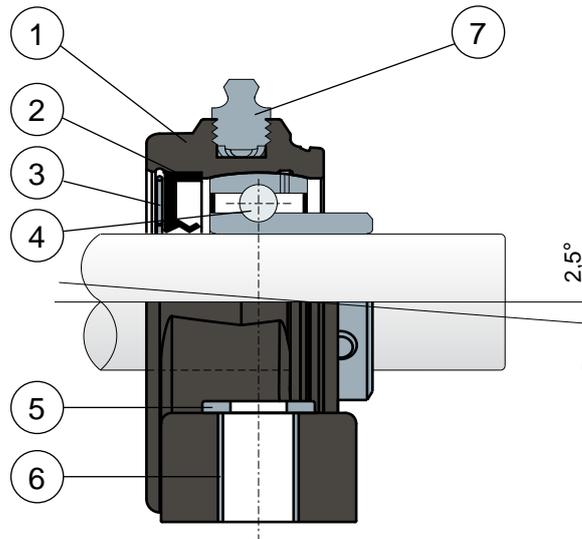

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Safety ring in stainless steel AISI 304.
- 4) Chrome steel or stainless steel bearing AISI 440.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 7) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCP/C series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Pillow Blocks

Technical data

Serie **UCP/CX**

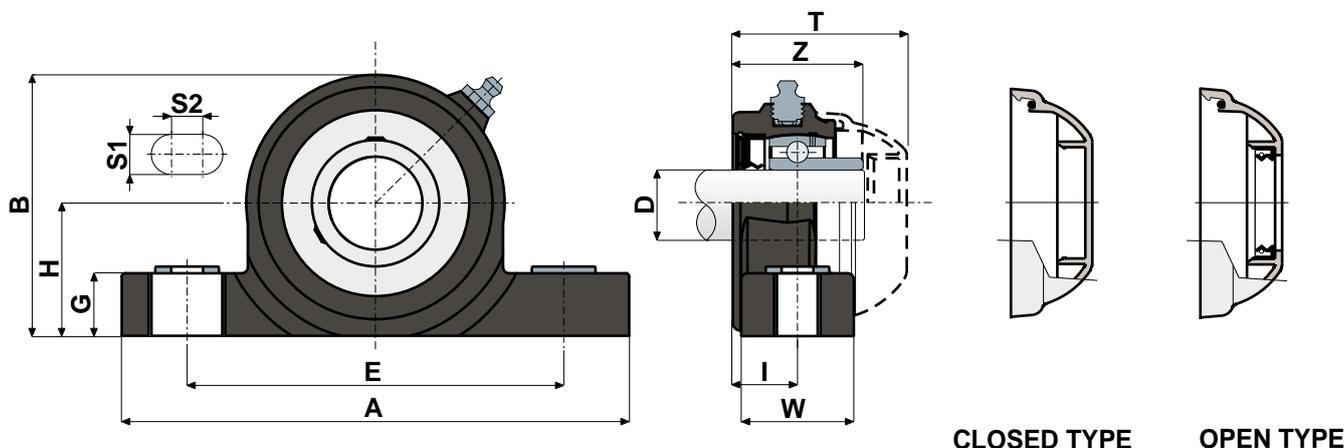

CLOSED TYPE

OPEN TYPE

D	SERIE	CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)										Bearing load (N)	Bearing support load	COVER CODES		COVER CODES			
		Black colour	White colour	E	A	S1	S2	G	H	B	I	W	Z	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
20	UCP 204 CX	84080	84774	96	130	13	10	20	33,5	65,5	18	30	36	49	12800	6600	5750	80254	80255	87259	83901
25	UCP 205 CX	83688	84775	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900	80075	80076	85384	85385
30	UCP 206 CX	83689	84776	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11200	9200	80011	80053	84100	80354
35	UCP 207 CX	83690	84777	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	25500	15300	11500	80077	80078	80969	80275
40	UCP 208 CX	85451	85452	136	185	13	10	20	50	100	22,5	38,6	51,5	70,7	32500	19800	11500	80256	80257	83088	86722

D	SERIE	STAINLESS STEEL BEARING AISI 440														GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)										Bearing load (N)	Bearing support load	COVER CODES		COVER CODES			
		Black colour	White colour	E	A	S1	S2	G	H	B	I	W	Z	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
20	UCP 204 CX	84081	84778	96	130	13	10	20	33,5	65,5	18	30	36	49	8300	6600	5750	80254	80255	87259	83901
25	UCP 205 CX	83702	84779	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	9150	7800	6900	80075	80076	85384	85385
30	UCP 206 CX	83703	84780	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	12500	11200	9200	80011	80053	84100	80354
35	UCP 207 CX	83704	84781	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	16600	15300	11500	80077	80078	80969	80275
40	UCP 208 CX	85453	85454	136	185	13	10	20	50	100	22,5	38,6	51,5	70,7	20000	19000	11500	80256	80257	83088	86722

VERSIONS WITH MEASURES IN INCHES

D	SERIE	CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015				
		Support CODES		DIMENSIONS (mm)										Bearing load (N)	Bearing support load	COVER CODES		COVER CODES				
		(inches)	(mm)	Black colour	White colour	E	A	S1	S2	G	H	B	I	W	Z	T	C	CO	(N)	Closed type	Open type	Closed type
1"	25,4	UCP 205 CX	84535	84931	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900	80075	85202	85384	87273
1 1/4"	31,75	UCP 206 CX	84536	84932	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11300	9200	80011	85203	84100	87274

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings, washers and safety ring made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCP/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Pillow Blocks

Serie **UCP**



Without cover and back gasket

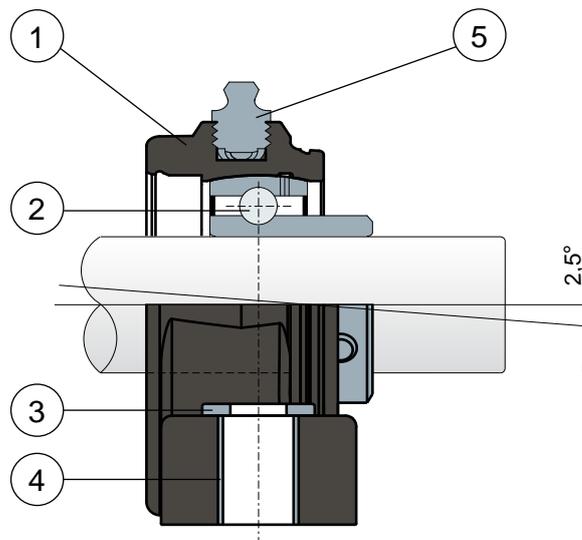

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440.
- 3) UNI 6592 support washer made out of stainless steel AISI 304.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCP/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Pillow Blocks

Technical data

Serie **UCP**

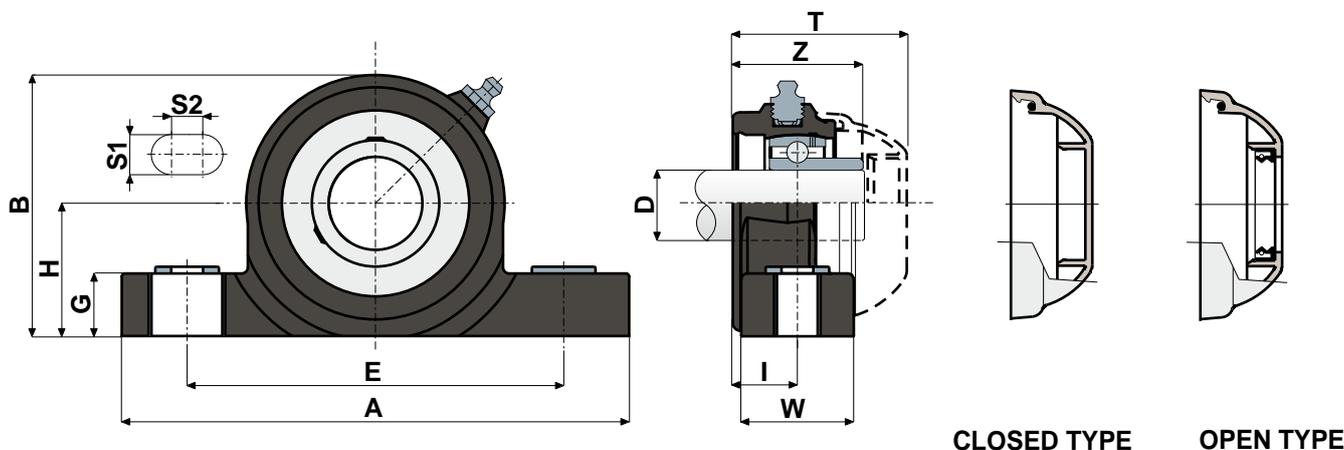

CLOSED TYPE

OPEN TYPE

D	SERIE	CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	S1	S2	G	H	B	I	W	Z	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
20	UCP 204	84082	84782	96	130	13	10	20	33,5	65,5	18	30	36	49	12800	6600	5750	80254	80255	87259	83901
25	UCP 205	83691	84783	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900	80075	80076	85384	85385
30	UCP 206	83692	84784	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11200	9200	80011	80053	84100	80354
35	UCP 207	83693	84785	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	25500	15300	11500	80077	80078	80969	80275
40	UCP 208	85455	85456	136	185	13	10	20	50	100	22,5	38,6	51,5	70,7	32500	19800	11500	80256	80257	83088	86722

D	SERIE	STAINLESS STEEL BEARING AISI 440														GREY RAL 7042		BLUE RAL 5015			
		Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	S1	S2	G	H	B	I	W	Z	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
20	UCP 204	84083	84786	96	130	13	10	20	33,5	65,5	18	30	36	49	8300	6600	5750	80254	80255	87259	83901
25	UCP 205	83705	84787	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	9150	7800	6900	80075	80076	85384	85385
30	UCP 206	83706	84788	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	12500	11200	9200	80011	80053	84100	80354
35	UCP 207	83707	84789	126	168	13	10	20	47,6	93,3	22,7	39	48	61,8	16600	15300	11500	80077	80078	80969	80275
40	UCP 208	85457	85458	136	185	13	10	20	50	100	22,5	38,6	51,5	70,7	20000	19000	11500	80256	80257	83088	86722

VERSIONS WITH MEASURES IN INCHES

D	SERIE	CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015				
		Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES		
		(inches)	(mm)	Black colour	White colour	E	A	S1	S2	G	H	B	I	W	Z	T	C	CO	(N)	Closed type	Open type	Closed type
1"	25,4	UCP 205	84537	84936	106	140	13	10	20	36,5	71,5	19,6	35	39	51,7	14000	7800	6900	80075	85202	85384	87273
1 1/4"	31,75	UCP 206	84538	84937	121	163	13	10	20	43	84,5	20,7	36	41,7	55,7	19500	11300	9200	80011	85203	84100	87274

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCP/C series is lack of back gasket and protection covers, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



Compact Pillow Blocks

Serie **UCPA/C**




NEW



On request covers in polypropylene blue colour Ral 5015.

Full protection of bearing

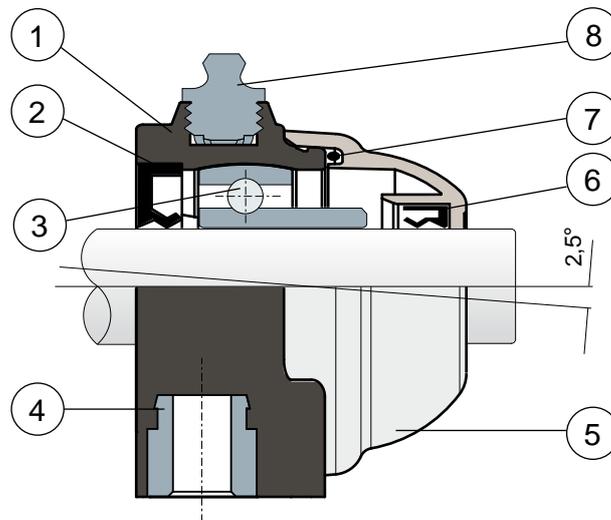

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Bushing made of nickel plated brass.
- 5) Protection cover made out of polypropylene (grey colour Ral 7042).
- 6) Front gasket made out of NBR rubber for turning shaft seal.
- 7) OR gasket made out of NBR rubber.
- 8) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Compact Pillow Blocks

Technical data

Serie **UCPA/C**

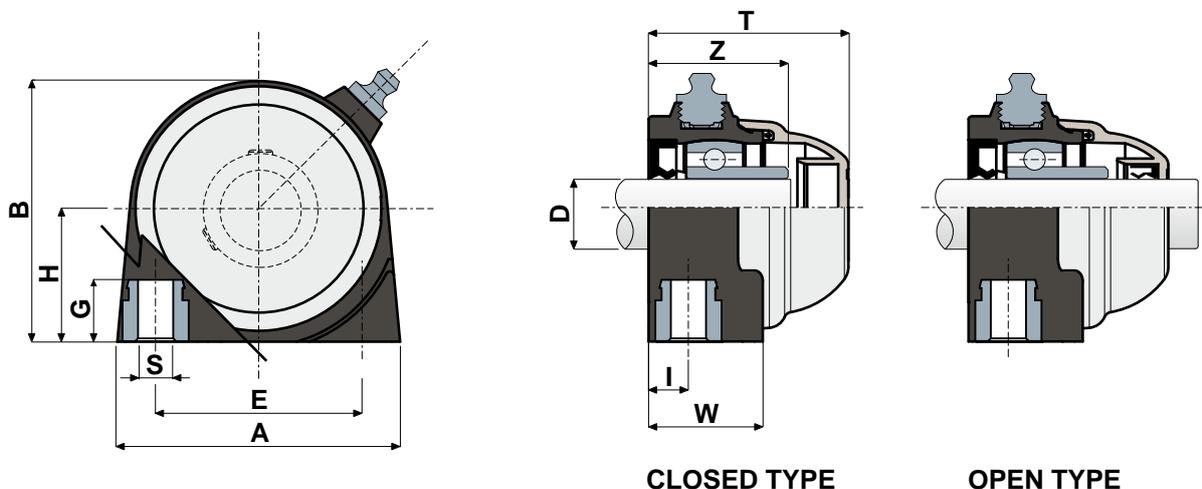

CHROME STEEL BEARING																		
D	SERIE	Support CODES				DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	S	G	H	B	I	W	Z	T	C	C0	
		Closed type	Open type	Closed type	Open type													
20	UCPA 204 C	85601	85603	85618	85619	50,8	70	M8	13	33,2	65	10	28	34,2	49	12800	6600	2500
25	UCPA 205 C	85604	85605	85620	85621	50,8	75	M10	13	36,5	72	12	30	38,3	52	14000	7800	3000

STAINLESS STEEL BEARING AISI 440																		
D	SERIE	Support CODES				DIMENSIONS (mm)										Bearing load (N)		Bearing support load (N)
		Black colour		White colour		E	A	S	G	H	B	I	W	Z	T	C	C0	
		Closed type	Open type	Closed type	Open type													
20	UCPA 204 C	85606	85607	85622	85623	50,8	70	M8	13	33,2	65	10	28	34,2	49	8300	6600	2500
25	UCPA 205 C	85608	85609	85624	85625	50,8	75	M10	13	36,5	72	12	30	38,3	52	9150	7800	3000

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser and bushings made out of nickel plated brass; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.


ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.

Compact Pillow Blocks

Serie **UCPA/CX**



Without protection cover

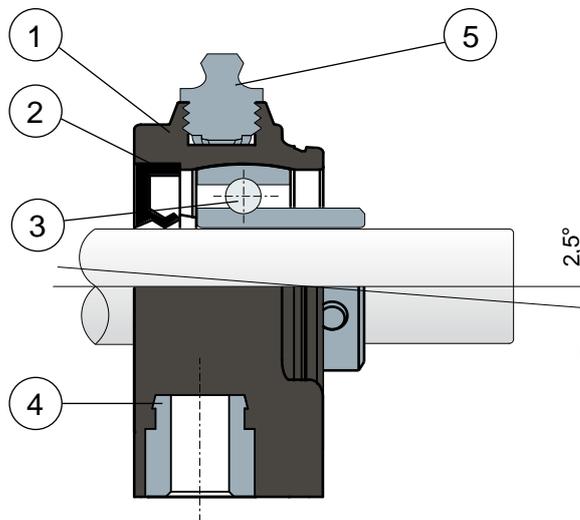

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Bushing made of nickel plated brass.
- 5) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCPA/C series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Compact Pillow Blocks

Technical data

Serie **UCPA/CX**

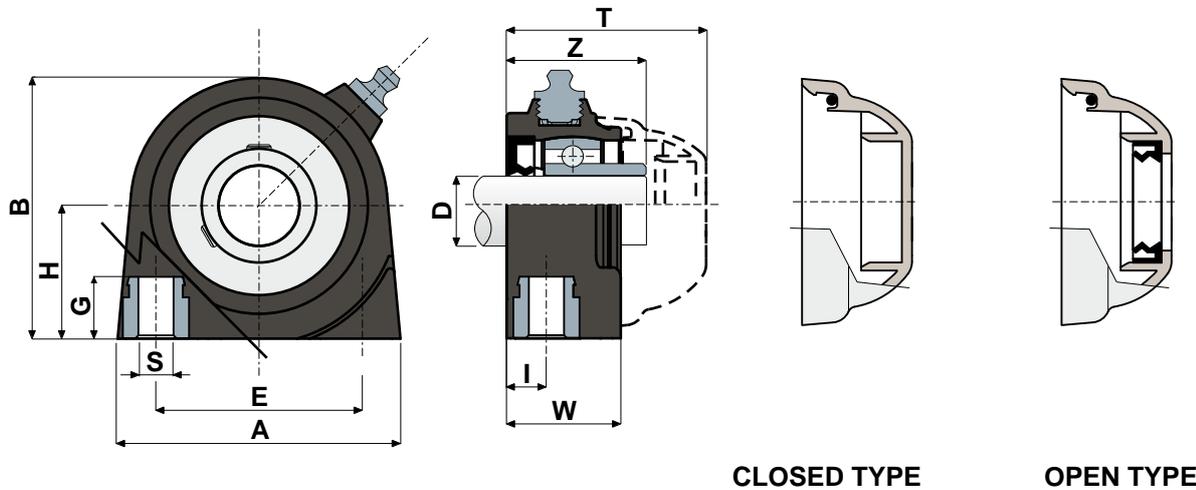

CHROME STEEL BEARING																	GREY RAL 7042	BLUE RAL 5015		
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)	Bearing support load (N)	COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	H	B	I	W	Z	T			C	CO	Closed type	Open type	Closed type
20	UCPA 204 CX	85610	85626	50,8	70	M8	13	33,2	65	10	28	34,2	49	12800	6600	2500	80254	80255	87259	83901
25	UCPA 205 CX	85611	85627	50,8	75	M10	13	36,5	72	12	30	38,3	52	14000	7800	3000	80075	80076	85384	85385

STAINLESS STEEL BEARING AISI 440																	GREY RAL 7042	BLUE RAL 5015		
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)	Bearing support load (N)	COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	H	B	I	W	Z	T			C	CO	Closed type	Open type	Closed type
20	UCPA 204 CX	85612	85628	50,8	70	M8	13	33,2	65	10	28	34,2	49	8300	6600	2500	80254	80255	87259	83901
25	UCPA 205 CX	85613	85629	50,8	75	M10	13	36,5	72	12	30	38,3	52	9150	7800	3000	80075	80076	85384	85385

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser and bushings made out of nickel plated brass; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCPA/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Compact Pillow Blocks

Serie **UCPA**



Without cover and back gasket

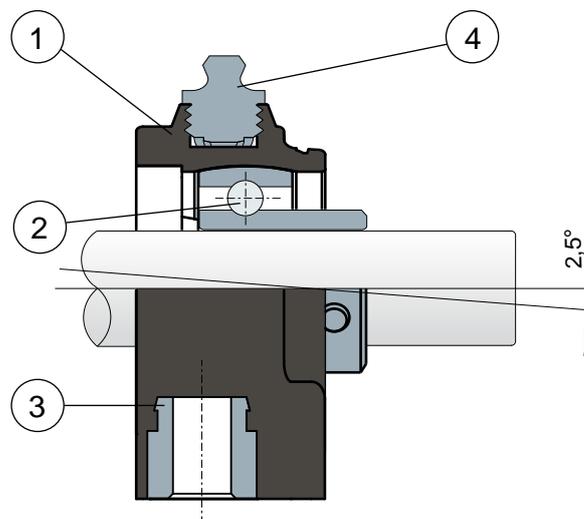

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440.
- 3) Bushing made of nickel plated brass.
- 4) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCPA/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Compact Pillow Blocks

Technical data

Serie **UCPA**

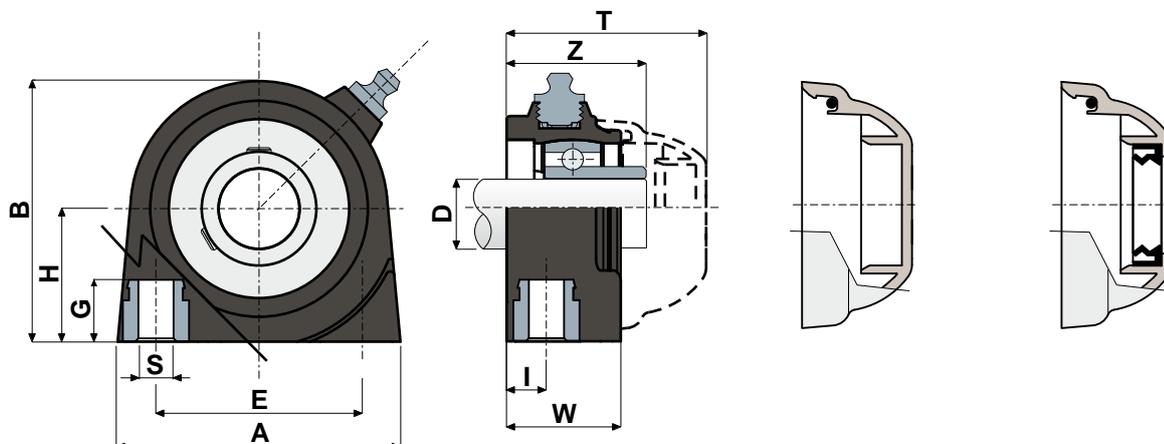

CLOSED TYPE

OPEN TYPE

CHROME STEEL BEARING																GREY RAL 7042		BLUE RAL 5015			
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	S	G	H	B	I	W	Z	T	C	CO	(N)	Closed type	Open type	Closed type	Open type	
20	UCPA 204	85614	85630	50,8	70	M8	13	33,2	65	10	28	34,2	49	12800	6600	2500	80254	80255	87259	83901	
25	UCPA 205	85615	85631	50,8	75	M10	13	36,5	72	12	30	38,3	52	14000	7800	3000	80075	80076	85384	85385	

STAINLESS STEEL BEARING AISI 440																GREY RAL 7042		BLUE RAL 5015			
D	SERIE	Support CODES		DIMENSIONS (mm)										Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	E	A	S	G	H	B	I	W	Z	T	C	CO	(N)	Closed type	Open type	Closed type	Open type	
20	UCPA 204	85616	85632	50,8	70	M8	13	33,2	65	10	28	34,2	49	8300	6600	2500	80254	80255	87259	83901	
25	UCPA 205	85617	85633	50,8	75	M10	13	36,5	72	12	30	38,3	52	9150	7800	3000	80075	80076	85384	85385	

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser and bushings made out of nickel plated brass; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCPA/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



Take-up bearing supports

Serie **UCT/C**




NEW




On request covers in polypropylene blue colour Ral 5015.


Full protection of bearing

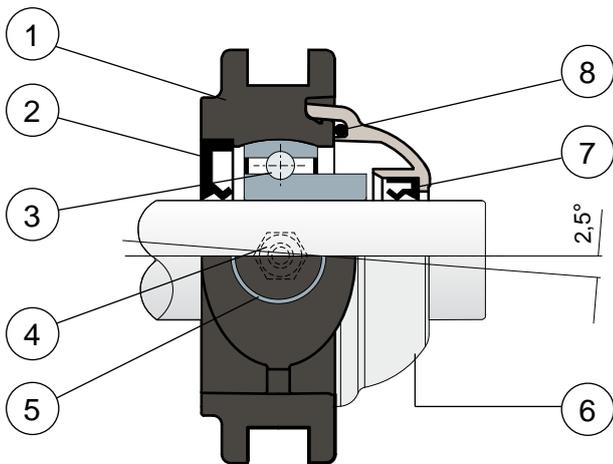


Example of application

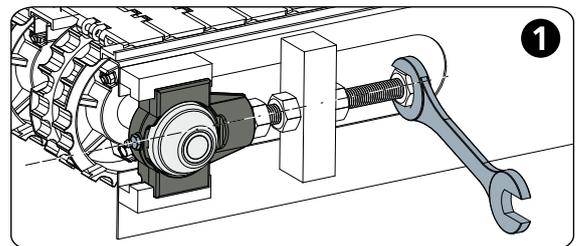

Lock the shaft

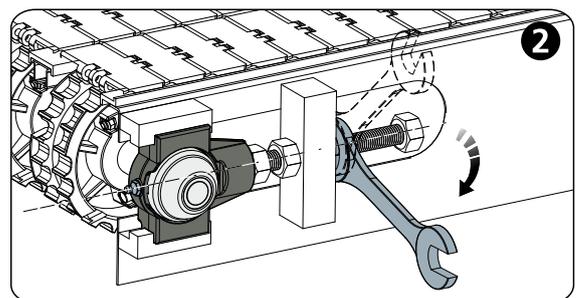

Unscrew the lock

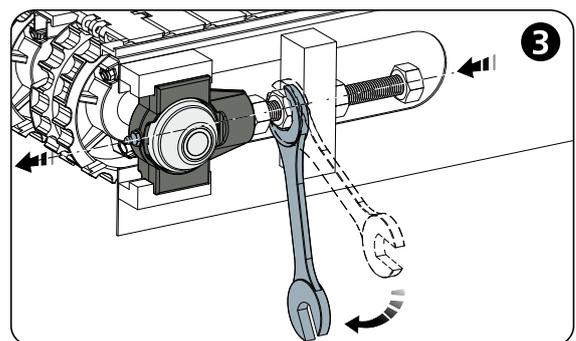

Screw to make the support advance

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.
- 5) Bushing made of nickel plated brass.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Take-up bearing supports

Technical data

Serie **UCT/C**

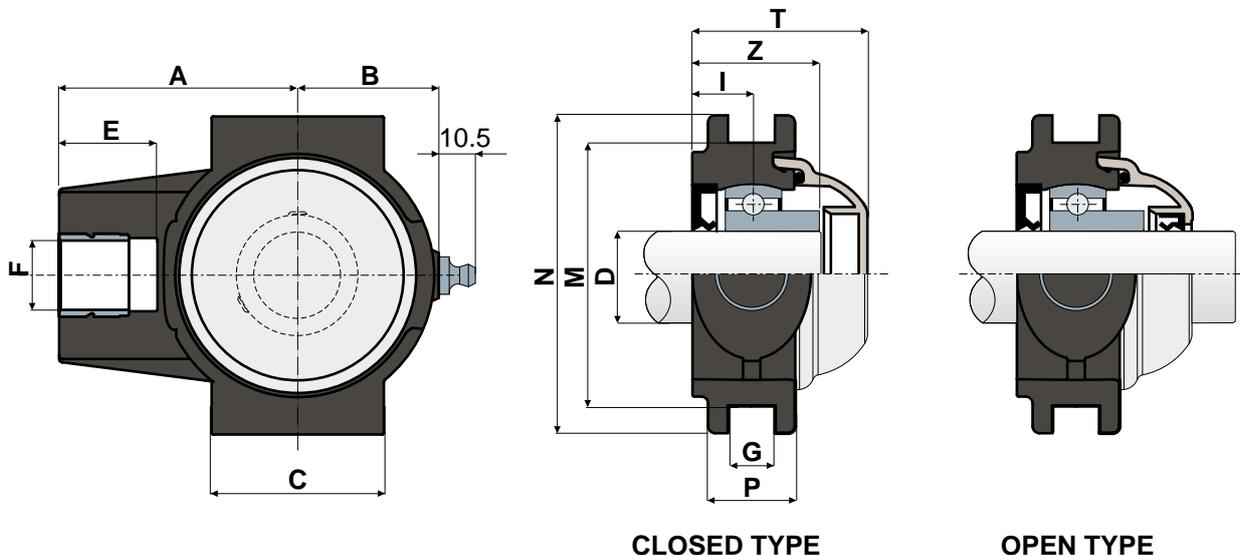

CLOSED TYPE

OPEN TYPE

CHROME STEEL BEARING																				
D	SERIE	Support CODES				DIMENSIONS (mm)											Bearing load (N)		Bearing support load	
		Black colour		White colour		A	B	C	E	F	G	I	M	N	P	Z	T	C	C0	(N)
		Closed type	Open type	Closed type	Open type															
20	UCT 204 C	85672	85673	85676	85677	63,5	35	50	28	M16	13,5	17	76,2	92	25	35	50	12800	6600	16000
25	UCT 205 C	86103	86104	86105	86106	68,5	40,5	50	28	M20	13,5	17	76,2	92	13,5	36,5	50,2	14000	7800	24000
30	UCT 206 C	86120	86122	86124	86126	77	48	57	28	M24	13,5	18,5	89	104	28	40,5	55,7	19500	11300	27000

STAINLESS STEEL BEARING AISI 440																				
D	SERIE	Support CODES				DIMENSIONS (mm)											Bearing load (N)		Bearing support load	
		Black colour		White colour		A	B	C	E	F	G	I	M	N	P	Z	T	C	C0	(N)
		Closed type	Open type	Closed type	Open type															
20	UCT 204 C	85674	85675	85678	85679	63,5	35	50	28	M16	13,5	17	76,2	92	25	35	50	8300	6600	16000
25	UCT 205 C	86107	86108	86109	86110	68,5	40,5	50	28	M20	13,5	17	76,2	92	13,5	36,5	50,2	9150	7800	24000
30	UCT 206 C	86128	86130	86132	86134	77	48	57	28	M24	13,5	18,5	89	104	28	40,5	55,7	12500	11200	27000

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser and bushings made out of nickel plated brass; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Take-up bearing supports


Serie **UCT/CX**




Without protection cover

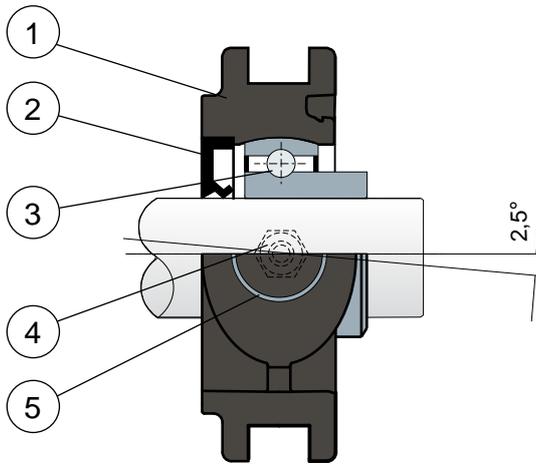


Example of application

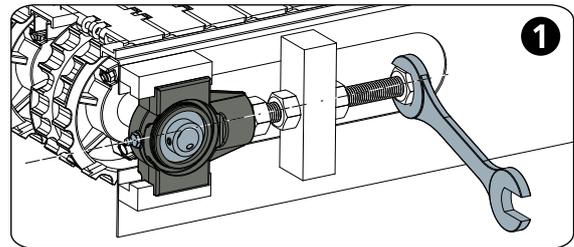

Lock the shaft

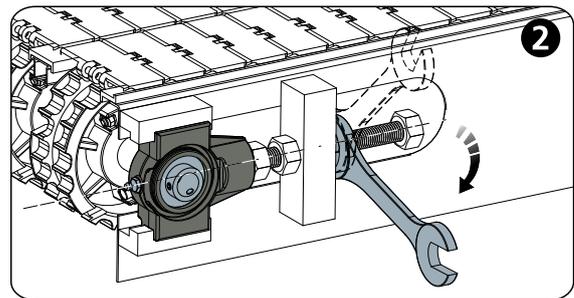

Unscrew the lock

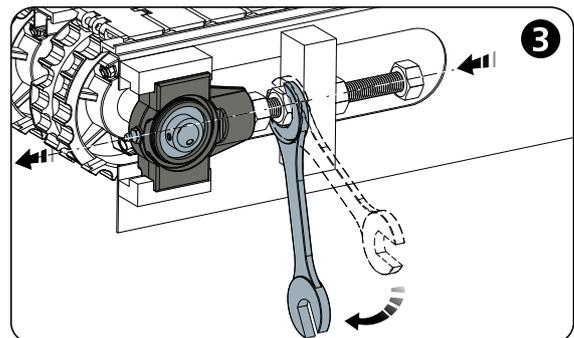

Screw to make the support advance

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.
- 5) Bushing made of nickel plated brass.

NOTE: The only difference from UCT/C series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Take-up bearing supports

Technical data

Serie **UCT/CX**

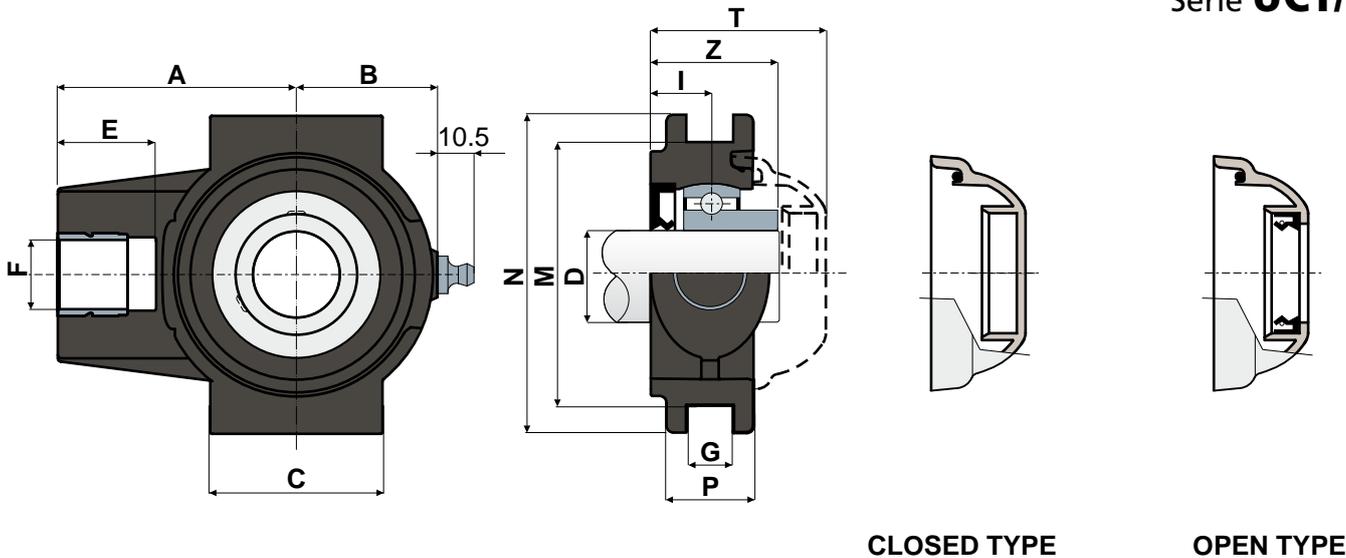

CLOSED TYPE

OPEN TYPE

		CHROME STEEL BEARING														GREY RAL 7042		BLUE RAL 5015					
D	SERIE	Support CODES		DIMENSIONS (mm)												Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	A	B	C	E	F	G	I	M	N	P	Z	T	C	C0	(N)	Closed type	Open type	Closed type	Open type	
20	UCT 204 CX	85680	85682	63,5	35	50	28	M16	13,5	17	76,2	92	25	35	50	12800	6600	16000	80254	80255	87259	83901	
25	UCT 205 CX	86111	86112	68,5	40,5	50	28	M20	13,5	17	76,2	92	13,5	36,5	50,2	14000	7800	24000	80075	80076	85384	85385	
30	UCT 206 CX	86136	86138	77	48	57	28	M24	13,5	18,5	89	104	28	40,5	55,7	19500	11300	27000	80011	80053	84100	80354	

		STAINLESS STEEL BEARING AISI 440														GREY RAL 7042		BLUE RAL 5015					
D	SERIE	Support CODES		DIMENSIONS (mm)												Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	A	B	C	E	F	G	I	M	N	P	Z	T	C	C0	(N)	Closed type	Open type	Closed type	Open type	
20	UCT 204 CX	85681	85683	63,5	35	50	28	M16	13,5	17	76,2	92	25	35	50	8300	6600	16000	80254	80255	87259	83901	
25	UCT 205 CX	86113	86114	68,5	40,5	50	28	M20	13,5	17	76,2	92	13,5	36,5	50,2	9150	7800	24000	80075	80076	85384	85385	
30	UCT 206 CX	86140	86142	77	48	57	28	M24	13,5	18,5	89	104	28	40,5	55,7	12500	11200	27000	80011	80053	84100	80354	

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser and bushings made out of nickel plated brass; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCT/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Take-up bearing supports


Serie **UCT**




Without cover and back gasket

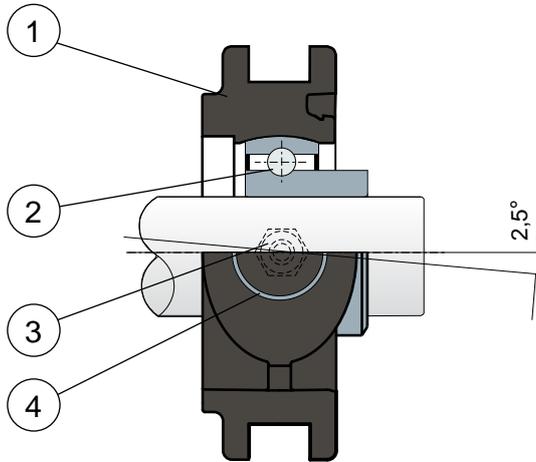


Example of application

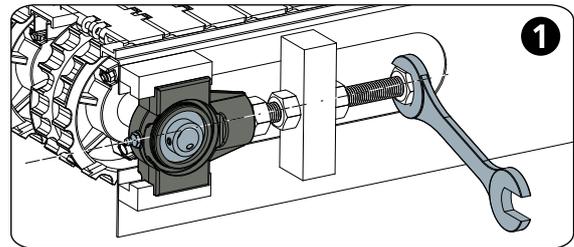

Lock the shaft

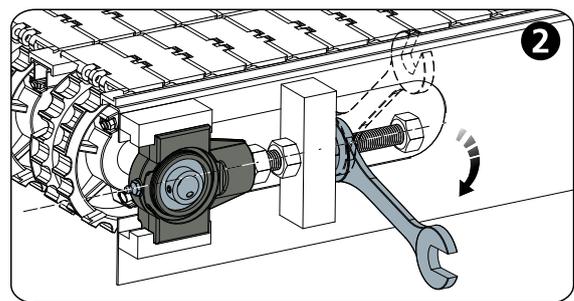

Unscrew the lock

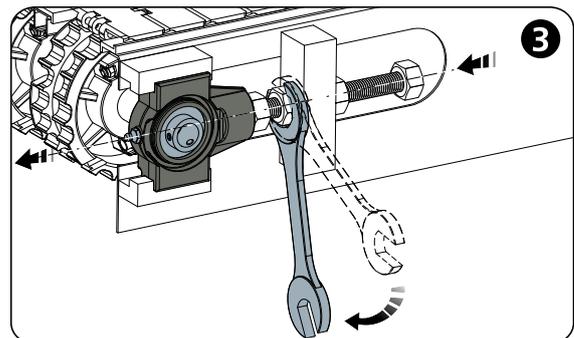

Screw to make the support advance

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440.
- 3) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.
- 4) Bushing made of nickel plated brass.

NOTE: The only difference from UCT/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Take-up bearing supports

Technical data

Serie **UCT**

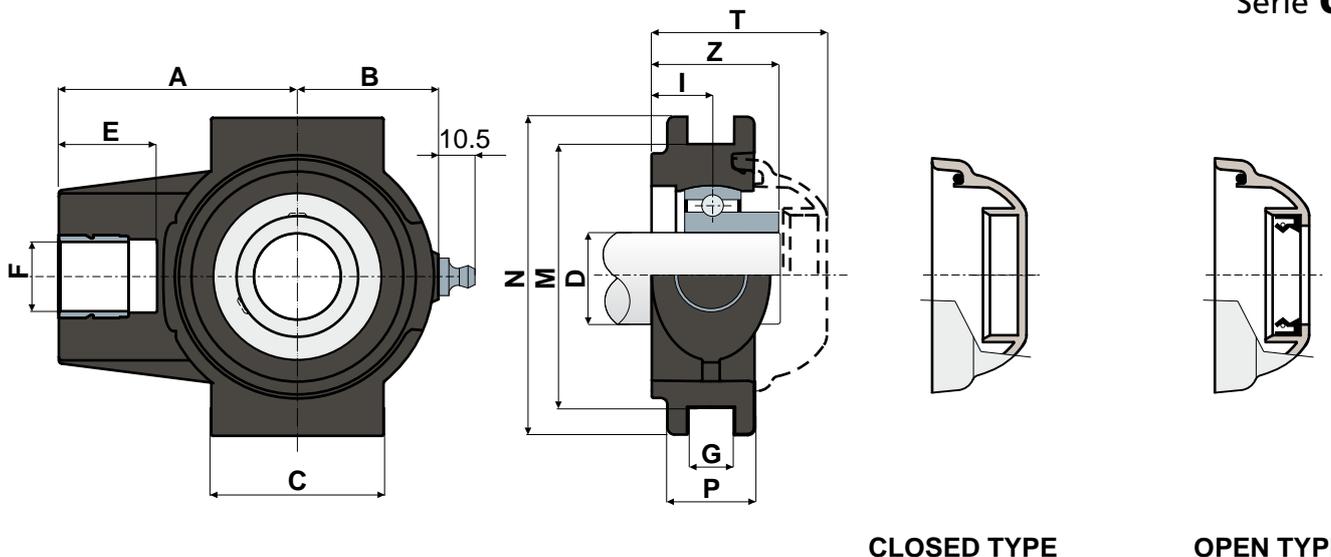

CLOSED TYPE

OPEN TYPE

		CHROME STEEL BEARING															GREY RAL 7042		BLUE RAL 5015					
D	SERIE	Support CODES		DIMENSIONS (mm)													Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	A	B	C	E	F	G	I	M	N	P	Z	T	C	C0	(N)	Closed type	Open type	Closed type	Open type		
20	UCT 204	85684	85686	63,5	35	50	28	M16	13,5	17	76,2	92	25	35	50	12800	6600	16000	80254	80255	87259	83901		
25	UCT 205	86115	86116	68,5	40,5	50	28	M20	13,5	17	76,2	92	13,5	36,5	50,2	14000	7800	24000	80075	80076	85384	85385		
30	UCT 206	86144	86146	77	48	57	28	M24	13,5	18,5	89	104	28	40,5	55,7	19500	11300	27000	80011	80053	84100	80354		

		STAINLESS STEEL BEARING AISI 440															GREY RAL 7042		BLUE RAL 5015					
D	SERIE	Support CODES		DIMENSIONS (mm)													Bearing load (N)		Bearing support load		COVER CODES		COVER CODES	
		Black colour	White colour	A	B	C	E	F	G	I	M	N	P	Z	T	C	C0	(N)	Closed type	Open type	Closed type	Open type		
20	UCT 204	85685	85687	63,5	35	50	28	M16	13,5	17	76,2	92	25	35	50	8300	6600	16000	80254	80255	87259	83901		
25	UCT 205	86117	86118	68,5	40,5	50	28	M20	13,5	17	76,2	92	13,5	36,5	50,2	9150	7800	24000	80075	80076	85384	85385		
30	UCT 206	86148	86150	77	48	57	28	M24	13,5	18,5	89	104	28	40,5	55,7	12500	11200	27000	80011	80053	84100	80354		

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser and bushings made out of nickel plated brass; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCT/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



Round flanged bearing supports

Serie **UCFC/C**




NEW



On request covers in polypropylene blue colour Ral 5015.

Full protection of bearing

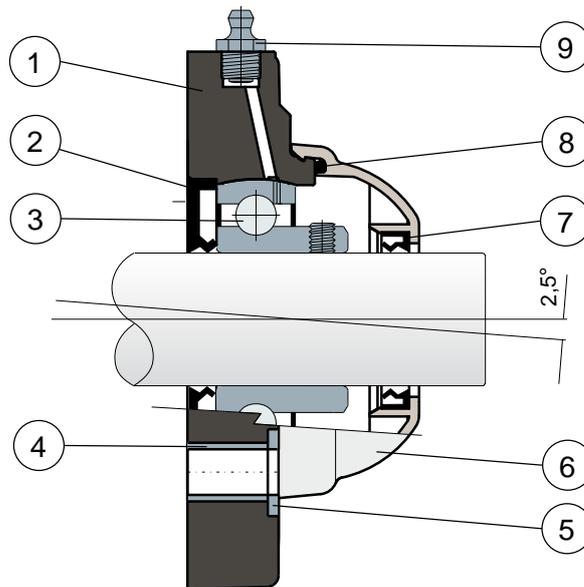

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Protection cover made out of polypropylene (grey colour Ral 7042).
- 7) Front gasket made out of NBR rubber for turning shaft seal.
- 8) OR gasket made out of NBR rubber.
- 9) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Round flanged bearing supports

Technical data

Serie **UCFC/C**

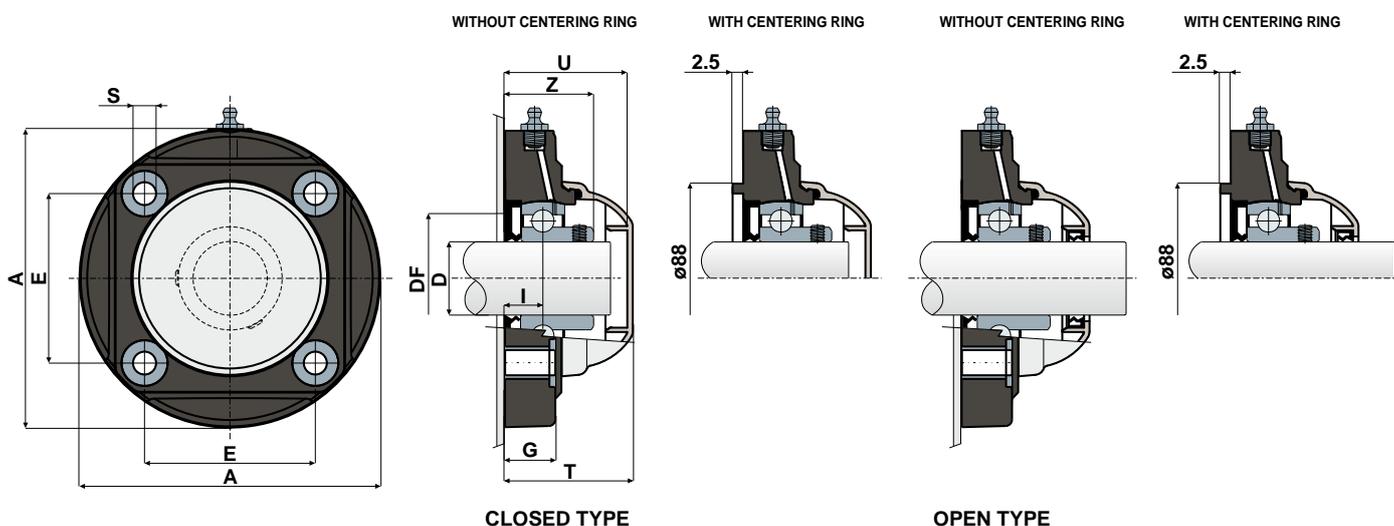

FLANGE WITHOUT CENTERING RING

		CHROME STEEL BEARING																
D	SERIE	Support CODES				DIMENSIONS (mm)								Bearing load (N)		Bearing support load		
		Black colour		White colour		E	A	S	G	I	Z	U	T	DF		C	C0	(N)
		Closed type	Open type	Closed type	Open type									Max	Min			
35	UCFC 207 C	85647	85649	85655	85657	77,8	137	10,5	26	17	40,8	56	58	70	55	25500	15300	19550

		STAINLESS STEEL BEARING AISI 440																
D	SERIE	Support CODES				DIMENSIONS (mm)								Bearing load (N)		Bearing support load		
		Black colour		White colour		E	A	S	G	I	Z	U	T	DF		C	C0	(N)
		Closed type	Open type	Closed type	Open type									Max	Min			
35	UCFC 207 C	85651	85653	85659	85661	77,8	137	10,5	26	17	40,8	56	58	70	55	16600	15300	19550

FLANGE WITH CENTERING RING

		CHROME STEEL BEARING																
D	SERIE	Support CODES				DIMENSIONS (mm)								Bearing load (N)		Bearing support load		
		Black colour		White colour		E	A	S	G	I	Z	U	T	DF		C	C0	(N)
		Closed type	Open type	Closed type	Open type									Max	Min			
35	UCFC 207 C	86029	86025	86031	86027	77,8	137	10,5	26	17	40,8	56	58	-	-	25500	15300	19550

		STAINLESS STEEL BEARING AISI 440																
D	SERIE	Support CODES				DIMENSIONS (mm)								Bearing load (N)		Bearing support load		
		Black colour		White colour		E	A	S	G	I	Z	U	T	DF		C	C0	(N)
		Closed type	Open type	Closed type	Open type									Max	Min			
35	UCFC 207 C	86030	86026	86032	86028	77,8	137	10,5	26	17	40,8	56	58	-	-	16600	15300	19550

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042.

FEATURES: Full protection of bearing against external agents. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.


ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.

Round flanged bearing supports

Serie **UCFC/CX**



Without protection cover

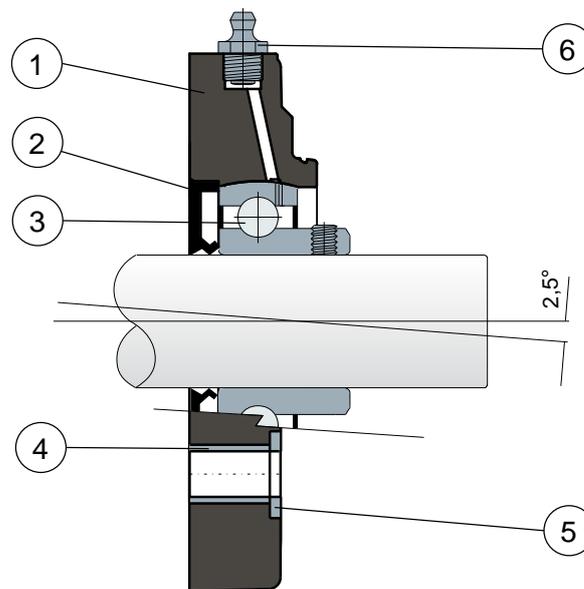

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Back gasket made out of NBR rubber for turning shaft seal.
- 3) Chrome steel or stainless steel bearing AISI 440.
- 4) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 5) UNI 6592 support washer made out of stainless steel AISI 304.
- 6) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCFC/C series is lack of protection cover, which can be ordered separately as an accessory.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Round flanged bearing supports

Technical data

Serie **UCFC/CX**

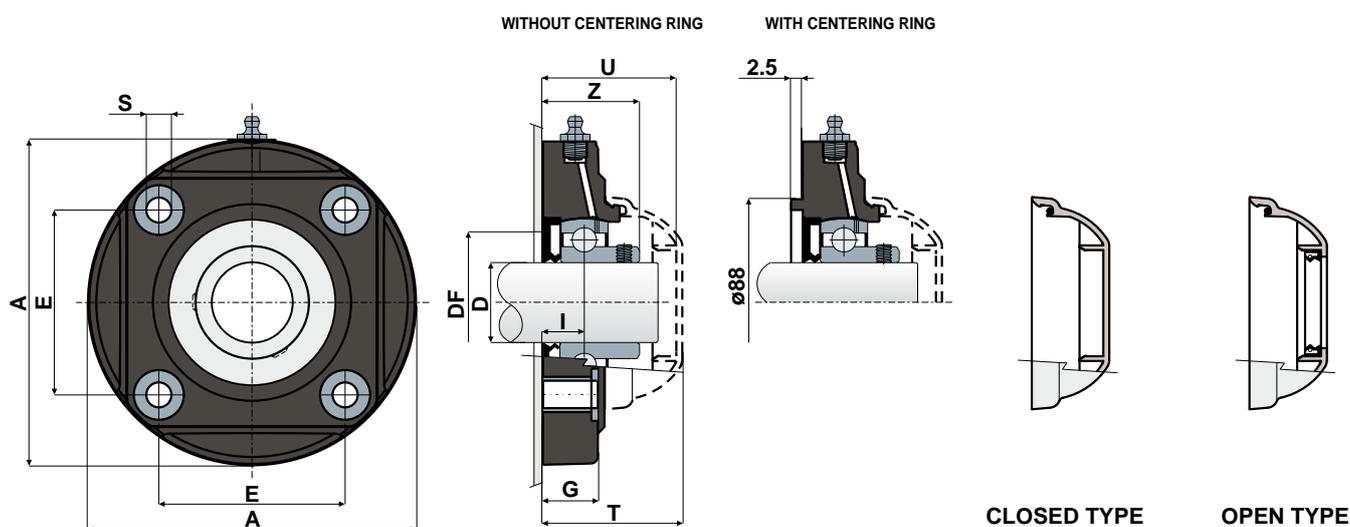

FLANGE WITHOUT CENTERING RING

CHROME STEEL BEARING															GREY RAL 7042		BLUE RAL 5015			
D	SERIE	CODES		DIMENSIONS (mm)								Bearing load (N)		Bearing support load		COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF Max	DF Min	C	C0	(N)	Closed type	Open type	Closed type	Open type
35	UCFC 207 CX	85663	85666	77,8	137	10,5	26	17	40,8	56	58	70	55	25500	15300	19550	80077	80078	80969	80275

STAINLESS STEEL BEARING AISI 440															GREY RAL 7042		BLUE RAL 5015			
D	SERIE	CODES		DIMENSIONS (mm)								Bearing load (N)		Bearing support load		COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF Max	DF Min	C	C0	(N)	Closed type	Open type	Closed type	Open type
35	UCFC 207 CX	85665	85667	77,8	137	10,5	26	17	40,8	56	58	70	55	16600	15300	19550	80077	80078	80969	80275

FLANGE WITH CENTERING RING

CHROME STEEL BEARING															GREY RAL 7042		BLUE RAL 5015			
D	SERIE	CODES		DIMENSIONS (mm)								Bearing load (N)		Bearing support load		COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF Max	DF Min	C	C0	(N)	Closed type	Open type	Closed type	Open type
35	UCFC 207 CX	86033	86035	77,8	137	10,5	26	17	40,8	56	58	-	-	25500	15300	19550	80077	80078	80969	80275

STAINLESS STEEL BEARING AISI 440															GREY RAL 7042		BLUE RAL 5015			
D	SERIE	CODES		DIMENSIONS (mm)								Bearing load (N)		Bearing support load		COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	I	Z	U	T	DF Max	DF Min	C	C0	(N)	Closed type	Open type	Closed type	Open type
35	UCFC 207 CX	86034	86036	77,8	137	10,5	26	17	40,8	56	58	-	-	16600	15300	19550	80077	80078	80969	80275

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCFC/C series is lack of protection cover which can be ordered separately as an accessory. Assembly with not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.




Round flanged bearing supports

Serie **UCFC**



Without cover and back gasket

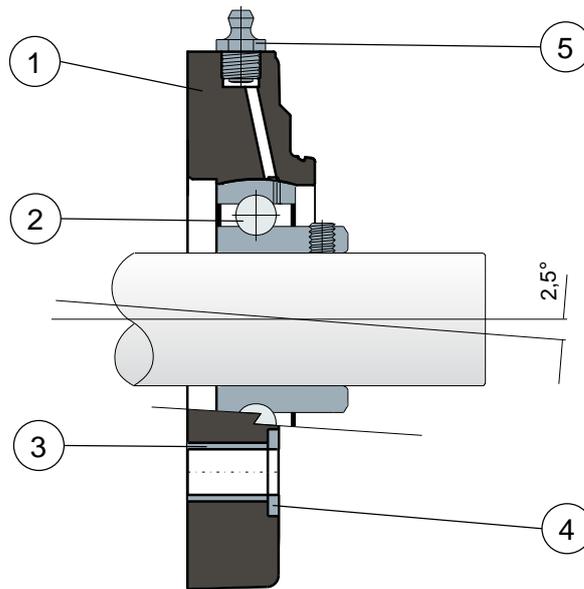

- 1) Support body made out of black or white polyamide reinforced with glass fibers.
- 2) Chrome steel or stainless steel bearing AISI 440.
- 3) Spacer for fixing reinforcement made out of stainless steel AISI 304.
- 4) UNI 6592 support washer made out of stainless steel AISI 304.
- 5) Greaser, straight type with 1/8 gas thread, made out of nickel-plated brass.

NOTE: The only difference from UCFC/C series is lack of back gasket and protection cover, which can be ordered separately as accessories.

Support dimensions respect ISO 3228 set of rules.

Maximum shaft alignment error 2,5°.


For further information please contact our technical office or sales department.



Round flanged bearing supports

Technical data

Serie **UCFC**

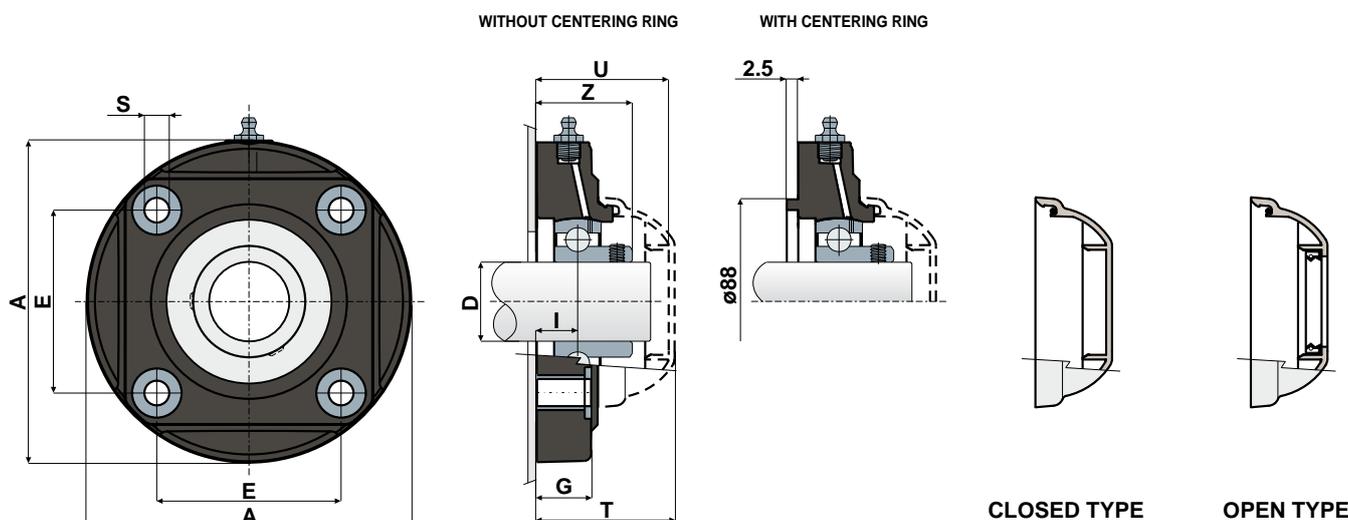

FLANGE WITHOUT CENTERING RING

		CHROME STEEL BEARING										GREY RAL 7042		BLUE RAL 5015				
D	SERIE	CODES		DIMENSIONS (mm)								Bearing load (N)	Bearing support load	COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	I	Z	U	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
35	UCFC 207	85668	85670	77,8	137	10,5	26	17	40,8	56	58	25500	15300	19550	80077	80078	80969	80275

		STAINLESS STEEL BEARING AISI 440										GREY RAL 7042		BLUE RAL 5015				
D	SERIE	CODES		DIMENSIONS (mm)								Bearing load (N)	Bearing support load	COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	I	Z	U	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
35	UCFC 207	85669	85671	77,8	137	10,5	26	17	40,8	56	58	16600	15300	19550	80077	80078	80969	80275

FLANGE WITH CENTERING RING

		CHROME STEEL BEARING										GREY RAL 7042		BLUE RAL 5015				
D	SERIE	CODES		DIMENSIONS (mm)								Bearing load (N)	Bearing support load	COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	I	Z	U	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
35	UCFC 207	86021	86023	77,8	137	10,5	26	17	40,8	56	58	25500	15300	19550	80077	80078	80969	80275

		STAINLESS STEEL BEARING AISI 440										GREY RAL 7042		BLUE RAL 5015				
D	SERIE	CODES		DIMENSIONS (mm)								Bearing load (N)	Bearing support load	COVER CODES		COVER CODES		
		Black colour	White colour	E	A	S	G	I	Z	U	T	C	CO	(N)	Closed type	Open type	Closed type	Open type
35	UCFC 207	86022	86024	77,8	137	10,5	26	17	40,8	56	58	16600	15300	19550	80077	80078	80969	80275

MATERIALS: Support made out of black or white colour PA+glass fiber; chrome steel or stainless steel bearing; greaser made out of nickel plated brass; reinforcement bushings and washers made out of stainless steel AISI 304; gaskets made out of NBR rubber; cover made out of polypropylene, grey colour RAL 7042 or blue Ral 5015.

FEATURES: The difference from UCFC/C series is lack of back gasket and protection cover, which can be ordered separately as accessories. Assembly with shouldered and not shouldered shafts. Maximum shaft alignment error 2,5°.

BOX QUANTITY: 8 pieces.

ON REQUEST: Versions with body in polypropylene + glass fiber and antibacterial additive; protection cover in different colours and with customized brand; box quantity according to your request; Viton gaskets, "Long life" bearings.



teCom
Technology Components

TECOM S.r.l.

Via A.M. Ampère, 43 - 42017 Novellara (RE) - Italy
Tel.: (+39) 0522-651203 Fax.: (+39) 0522-756251
Web: <http://www.tecomsrl.it> e-mail: info@tecomsrl.it